


CORONA

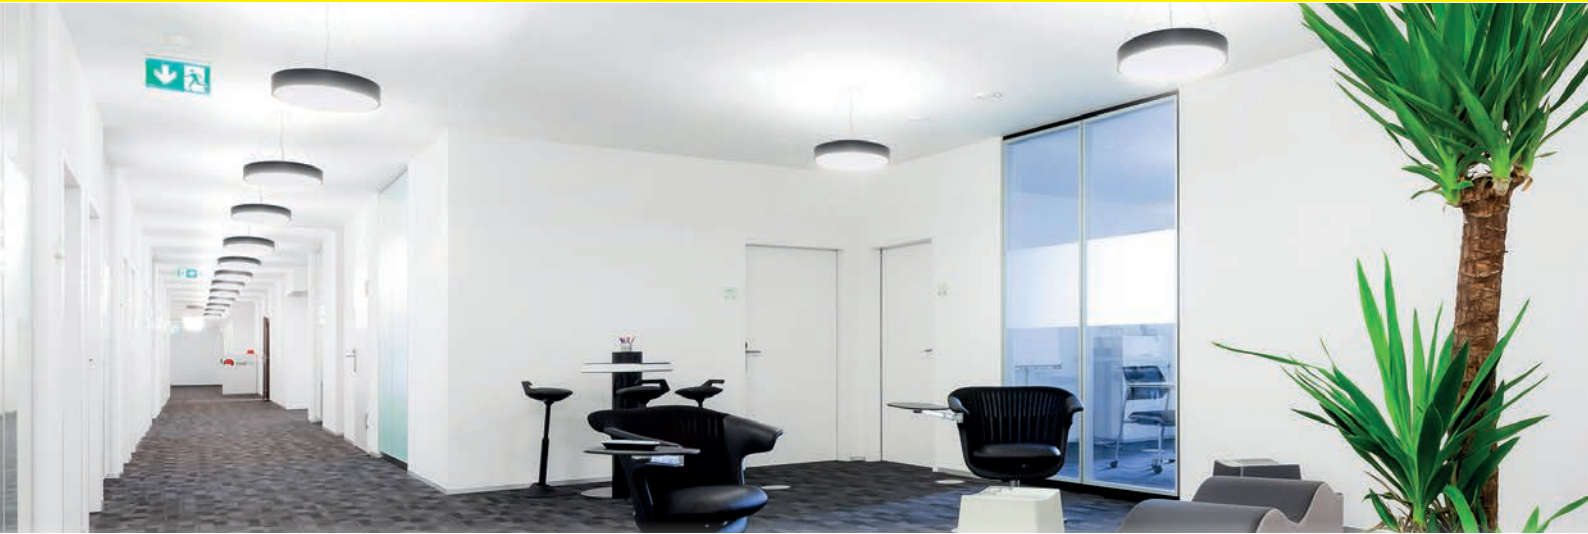



Construction

The Corona is designed to be surface mounted or suspended to a single suspension point. Available in 4 different sizes and a wide variety of RAL colours. It is the ideal option when lighting a large open space or simply wanting to create a stunning feature. The versatility of the aluminium body and LED technology used allows for inclusion of many control options, including dimming, emergency options, wireless switching and scene-setting Casambi technology.

- // Decorative surface or suspended LED luminaire
- // European branded LED drivers
- // Up to 124 lumens per circuit watt
- // Direct/Indirect option available - 70:30 ratio
- // Extruded aluminium body available in 16 colours
- // Colour-matched ceiling rose
- // 400mm, 600mm, 900mm and 1150mm diameter
- // LED 4000K, CRI>80, 50,000h life
- // Opal polycarbonate diffuser
- // Compatible with Casambi wireless control system
- // 5-year warranty

Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities, and Residential Properties.

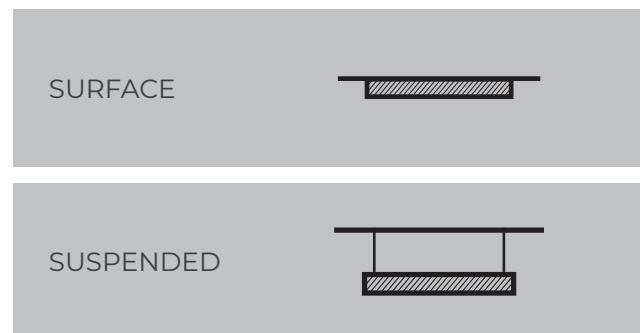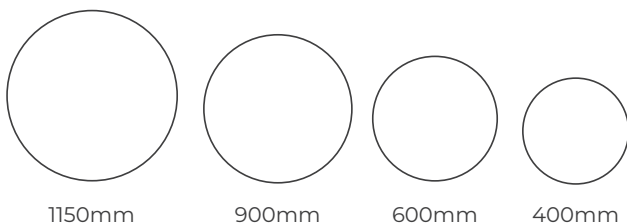

CORONA

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Size
Corona Surface or Suspended Direct Lighting					
CRA34	36W	3276	91	4000K	400 x 85mm
CRA59	47W	5452	116	4000K	600 x 85mm
CRA75	68W	7956	117	4000K	900 x 85mm
CRA89	105W	13020	124	4000K	1150 x 85mm
Corona Suspended Direct/Indirect - 70%/30%					
CRA59/DIR/IND	72W	6696	93	4000K	600 x 85mm
CRA75/DIR/IND	103W	10506	102	4000K	900 x 85mm
CRA89/DIR/IND	159W	16854	106	4000K	1150 x 85mm

Control Options


Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Driver
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/3K	3000K LED

Colour Options

Option Code	Description
/W	White (RAL 9016)
/G	Grey (RAL 9006)
/B	Black (RAL 9005)
/U (POA)	Blue (RAL 5002)
/V (POA)	Green (RAL 6018)
/T (POA)	Yellow (RAL 1021)
/K (POA)	Red (RAL 3020)
/N (POA)	Jungle
/D (POA)	Goldeneye
/O (POA)	Sahara
/L (POA)	Autumn
/R (POA)	Rusty chain
/C (POA)	Pure chocolate
/I (POA)	Mist
/9 (POA)	Darkrock
/I (POA)	Carbon

Suspension Options

Option Code	Description
Ceiling Rose with Central Suspension Point (Including 1.5m wires)	
CR1	Ceiling Rose for 400, 600, 900 and 1150mm versions.
Colour-matched Ceiling Rose supplied unless specified otherwise	
Vertical Suspension Sets (Including 1.5m wires)	
SUSKIT -T1	Vertical Suspension Kit for 400, 600 and 900mm versions
Ceiling Rose for Vertical Suspension (Excluding wires)	
CRO	Ceiling Rose with Vertical Suspension Sets
Supply Cable	
CABTR3C	1.5m Transparent Current Cable 3 x0.75mm ²
CABTR5C	1.5m Transparent Current Cable 5 x0.75mm ²
NOTE: Alternative length suspension kits available - POA	



For optional features, please include the option code suffix with the product code when ordering.