

SCENEPAD4

Casambi ScenePad4 Rotary

- // Bluetooth 4 button user interface for presets in the Casambi mesh network, for control of scenes, groups or individual luminaires
- // Indicator lights identify which preset has been selected
- // Smooth dimming via rotary ring
- // Comes with wall bracket, or for desktop usage
- // Built-in battery, rechargeable via USB, with charge indicator
- // Optional toggle function for extra off commands




Construction

The ScenePad4 is a versatile, battery-powered 4-button wall switch designed for high-end Casambi wireless lighting systems. Featuring four programmable scene buttons and a rotary dimming ring, it offers flexible control over lighting scenes, or more granular control of individual luminaires, groups, or elements.

Powered by a rechargeable built-in battery, the SP4R can be wall mounted or can be remote, on any executive desktop or horizontal surface.

With a wireless range of up to 50 meters in open air and a sleek, compact design, the CBU-SP4R is suitable for various indoor applications. Available in a range of high end metallic finishes, it seamlessly blends into luxury interior aesthetics.

Controls Guide

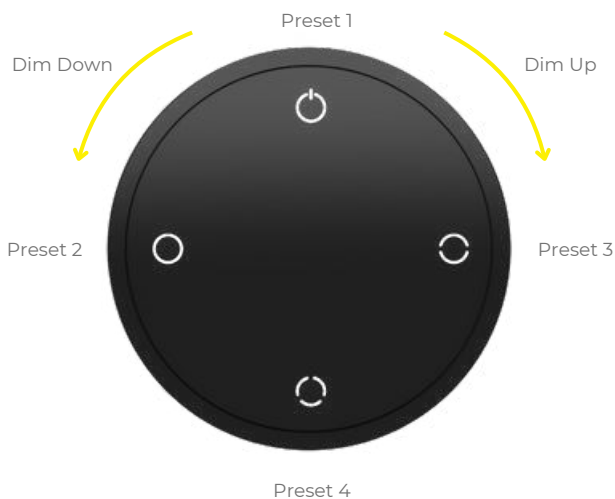

Product Code	Finish	Dimensions
CBU-SP4R	Add code as below	65mm x 23mm



/BK	/LG	/BS	/BC
Black	Light Gold	Brushed Stainless	Bright Chrome

Technical Specifications	
Battery Type	Built-in lithium 600mAh
Maximum output power	-40 dBm to +7 dBm
Ambient temperature	0°C to +40°C
Max humidity	0 - 65%, non condensing
Weight	202 g
Ingress Protection	IP20

Casambi uses Bluetooth mesh network technology, so each Casambi unit, or Casambi Ready product, acts also as a repeater. Longer ranges can be achieved by using any Casambi unit as a repeater. Range is highly dependent on the surrounding and obstacles, such as walls and building materials.

