

## EPIC

### IP65 Sealed LED Downlight

- // 60° beam angle
- // Available in 5W, 10W or 13W
- // Mains dimmable as standard
- // CRI>80
- // Tiltable version available in 13W
- // 3000K option available
- // PF 0.9
- // 40,000 hours rated life
- // Complete with driver
- // 5-year warranty



### Construction


Our Epic range of LED downlights has been designed as an IP65 LED downlight suitable for multiple applications where a high-output, recessed downlighter is required. It is suitable for installation directly into either suspended or plasterboard ceilings.

The luminaire housing is manufactured using die-cast aluminium and finished with a white powder-coated bezel. The faceted reflector is manufactured using highly polished aluminium material, and the sealed diffuser is manufactured using PMMA material.

### Typical Applications

Toilets, Shower Rooms, Corridors, General Office Areas, Conference Rooms, Reception Areas, Retail and Leisure Facilities.

### Size Options

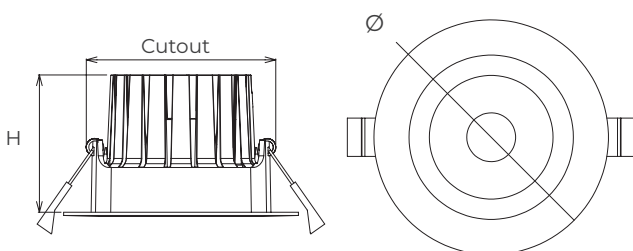

EPC5 (A)	EPC10 (B)	EPC13 (C)
Ø 80mm	Ø 110mm	Ø 110mm
H 40mm	H 64.3mm	H 64.3mm
Cutout 67mm	Cutout 89mm	Cutout 89mm



Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Size
<b>Fixed</b>					
EPC5	6W	625	110	4000K	A
EPC10	10W	1109	103	4000K	B
<b>Tiltable</b>					
EPC/T13	12W	1299	107	4000K	C

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Dimmable Driver
/DALI	DALI/DSI Dimmable Driver
/3K	3000K LED
/WHT	White Option
/BLK	Black Option

For optional features, please include the option code suffix with the product code when ordering.