

## LUMALED

### High-Power Slimline LED Downlight

- // Ideal replacement for 210mm PL downlights
- // Slimline design only 45mm
- // High-performance aluminium heat sink
- // 90° wide beam angle
- // Switchable 3 x CCT 3000K, 4000K, 5700K
- // Surface/suspension case option available in black and white
- // DALI and emergency options available
- // Dimming available when using Triac dimmer
- // IP54
- // CRI>80, 50,000 hours life
- // 5-year warranty




### Construction

Our LumaLED luminaire has been designed as a direct replacement for 210mm PL downlights. The panel surround is manufactured using white powder coated aluminium material. The high-performance heat sink is manufactured using die-cast aluminium, connection from the luminaire to the driver is a simple process utilising simple plug and play connectors. The 3 x CCT colour changeable switch makes for easy use to create the correct temperature light for the right setting.

### Typical Applications

Toilets, Corridors, Stairways, General Office Areas, Reception Areas, Conference Rooms, Retail Units, Schools, Hotels and Leisure Facilities.

### Size Options

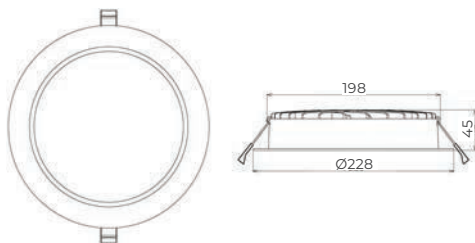


Size		
Ø 228mm bezel	Ø 198mm cut out	H 45mm



Surface Can Option



Suspension Can Option

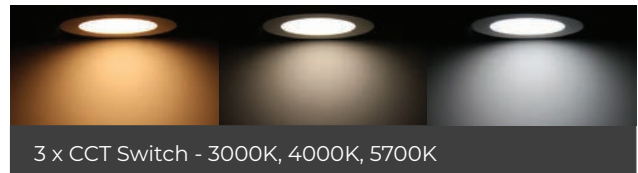

3 x CCT Switch - 3000K, 4000K, 5700K

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature
LLD18	16W	1860	114	4000K
LLD25	23W	2613	111	4000K

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Dimmable Driver
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/LUM/SUR/WHT	White Surface/Suspension Case Option
/LUM/SUR/BLK	Black Surface/Suspension Case Option
/MLESUS	Suspension Kit (3 Required Per Fitting)
/CRI	Ceiling Rose With Central Suspension Point (Specify Colour)

For optional features, please include the option code suffix with the product code when ordering.