

## M-LINE RECESSED SYSTEM




### Construction

The recessed system is available in standard lengths up to 2840mm with bespoke formations and continuous lengths available to order. The standard system is designed for ceiling mounting, however, wall mounting systems can be supplied on request. Installation is simple using the easy-fix bracket system.

### Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities, and Residential Properties.

- // Aluminium extruded sections in 9 standard lengths
- // Bespoke lengths available to order in 140mm increments
- // 104 lumens per watt
- // Colour options in 3000K/4000K/5000K
- // Custom-shaped formations subject to design
- // Incorporates European branded LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Clip-in gear tray for easy installation
- // Opal polycarbonate diffuser
- // Tuneable white and RGB options available
- // Dimmable and emergency options available
- // Compatible with Casambi wireless control system
- // CRI>80, 50,000h life
- // 5-year warranty

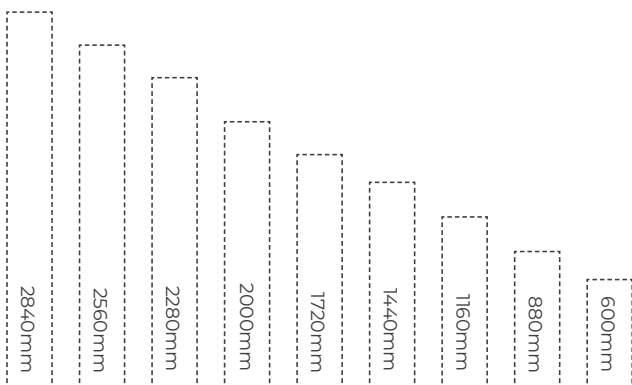

RECESSED CEILING



RECESSED WALL



## M-LINE RECESSED SYSTEM



Typical Recessed Installation



Recessed System

Recessed System						
Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Size	Cutout Dimensions
MLER600	12.5W	1298	104	4000K	600mm	584mm x 52mm
MLER880	19W	1974	104	4000K	880mm	864mm x 52mm
MLER1160	25W	2596	104	4000K	1160mm	1144mm x 52mm
MLER1440	31W	3245	104	4000K	1440mm	1424mm x 52mm
MLER1720	37.5W	3895	104	4000K	1720mm	1704mm x 52mm
MLER2000	44W	4543	104	4000K	2000mm	1984mm x 52mm
MLER2280	50W	5192	104	4000K	2280mm	2264mm x 52mm
MLER2560	56W	5841	104	4000K	2560mm	2544mm x 52mm
MLER2840	62.5W	6490	104	4000K	2840mm	2824mm x 52mm


**NOTE:** Longer bespoke lengths available in 140mm increments.

### Control Options


Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Driver
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/3K	3000K LED
/5K	5000K LED
/RGB	Colour Changing LED
/TW	Tunable White LED

### Colour Options

Option Code	Description
/W	White (RAL 9016)
/G	Grey (RAL 9006)
/B	Black (RAL 9005)
/U (POA)	Blue (RAL 5002)
/V (POA)	Green (RAL 6018)
/T (POA)	Yellow (RAL 1021)
/K (POA)	Red (RAL 3020)
/N (POA)	Jungle
/D (POA)	Goldeneye
/O (POA)	Sahara
/L (POA)	Autumn
/R (POA)	Rusty chain
/C (POA)	Pure chocolate
/I (POA)	Mist
/9 (POA)	Darkrock
/I (POA)	Carbon

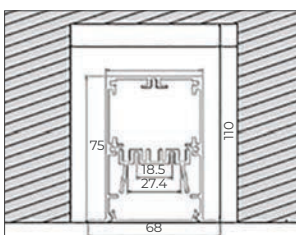

Aperture Size Within Ceiling Void

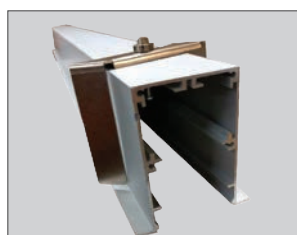

Fitted Recessed Bracket

For optional features, please include the option code suffix with the product code when ordering.