


M-LINE RECESSED TRIMLESS SYSTEM

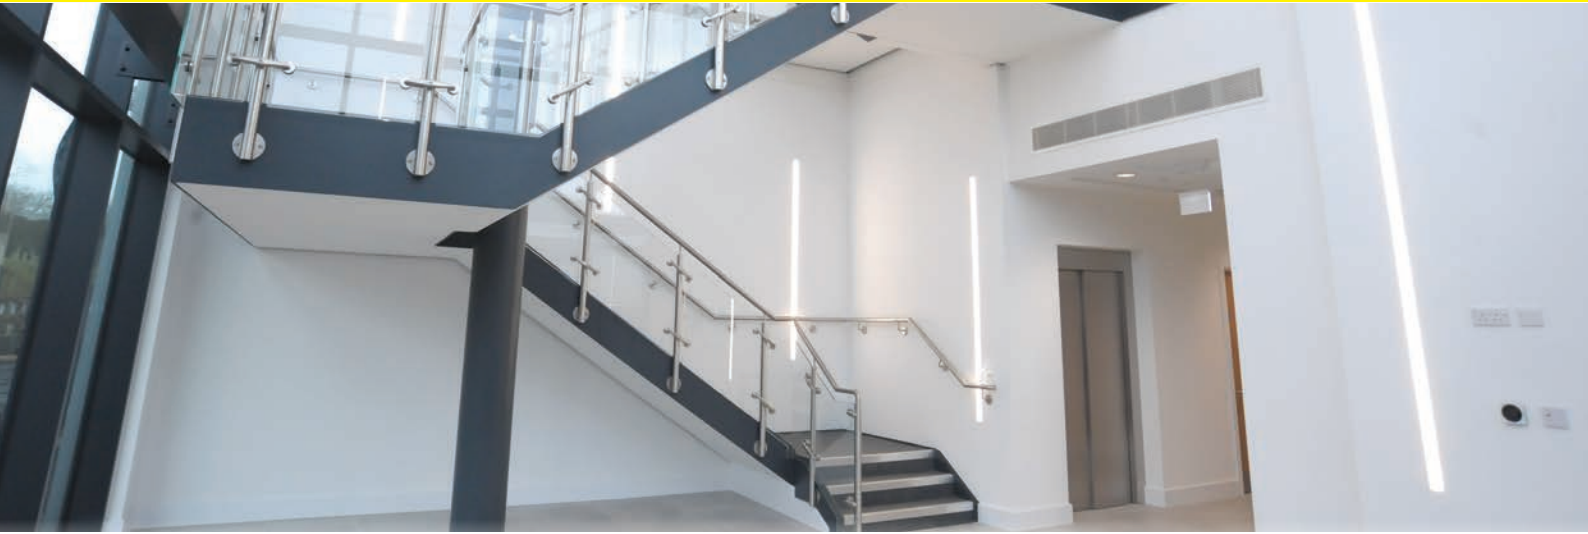


Construction

The recessed trimless system is available in standard lengths up to 2824mm with bespoke formations and continuous lengths available to order. The standard system is designed for ceiling mounting, however, wall mounting systems can be supplied on request. Installation is simple using the easy-fix bracket system.

Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities, and Residential Properties.

- // Unique trim enables easy finishing with ceiling
- // Aluminium extruded sections in 9 standard lengths
- // Bespoke lengths available to order in 140mm increments
- // 104 lumens per watt
- // Colour options in 3000K/4000K/5000K
- // Custom shaped formations available subject to design
- // Incorporates European branded LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Clip-in gear tray for easy installation
- // Opal polycarbonate diffuser
- // Tuneable white and RGB options available
- // Dimmable and emergency options available
- // Compatible with Casambi wireless control system
- // CRI>80, 50,000h life
- // 5-year warranty

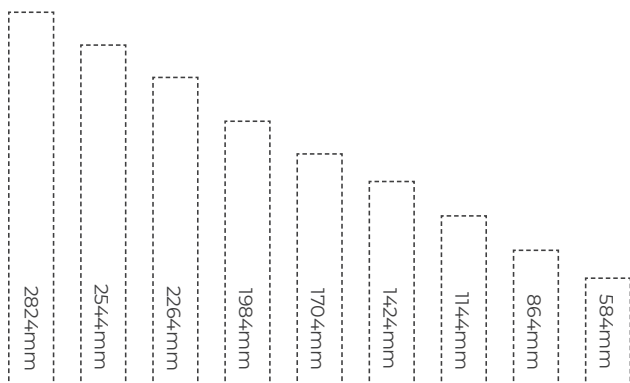


RECESSED CEILING



RECESSED WALL




M-LINE RECESSED TRIMLESS SYSTEM

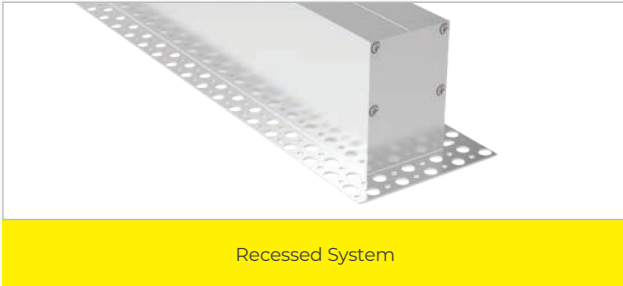

Recessed Trimless System						
Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Size	Cutout Dimensions
MLERT584	12.5W	1298	104	4000K	584mm	584mm x 52mm
MLERT864	19W	1947	104	4000K	864mm	864mm x 52mm
MLERT1144	25W	2596	104	4000K	1144mm	1144mm x 52mm
MLERT1424	31W	3245	104	4000K	1424mm	1424mm x 52mm
MLERT1704	37.5W	3895	104	4000K	1704mm	1704mm x 52mm
MLERT1984	44W	4543	104	4000K	1984mm	1984mm x 52mm
MLERT2264	50W	5192	104	4000K	2264mm	2264mm x 52mm
MLERT2544	56W	5841	104	4000K	2544mm	2544mm x 52mm
MLERT2824	62.5W	6490	104	4000K	2824mm	2824mm x 52mm

NOTE: Longer bespoke lengths available in 140mm increments.

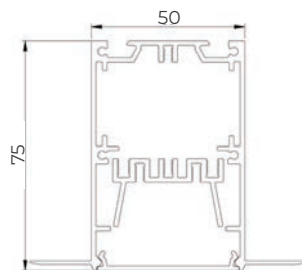

Control Options

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Driver
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/3K	3000K LED
/5K	5000K LED
/RGB	Colour Changing LED
/TW	Tunable White LED

For optional features, please include the option code suffix with the product code when ordering.