

M-LINE WALL-MOUNTED SYSTEM





Construction

The wall-mounted system utilises the same profile as our surface and suspended system and is available in standard lengths up to 2824mm with bespoke lengths available to order. Wall mounting is achieved by directly fixing the supplied bracket to the wall and attaching through the side of the profile. Uplighting is available on lengths from 584mm upwards.

Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Hotels and Leisure Facilities and Residential Properties.

- // Aluminium extruded sections in 9 standard lengths
- // 104 lumens per watt
- // Colour options in 3000K/4000K/5000K
- // Incorporates European branded LED drivers
- // Direct/Indirect lighting options available
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Includes wall-mounted brackets
- // Opal polycarbonate diffuser
- // Tuneable white and RGB options available
- // Dimmable and emergency options available
- // Compatible with Casambi wireless switching system
- // Dual switch option available
- // CRI>80, 50,000h life
- // 5-year warranty

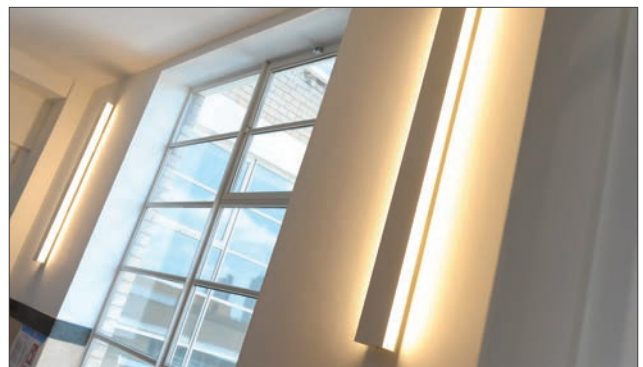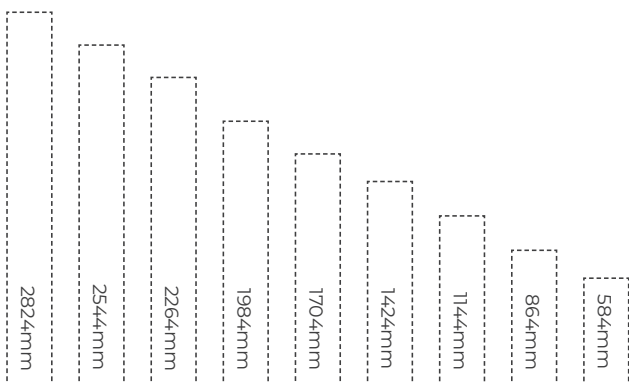

M-LINE WALL-MOUNTED SYSTEM



Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Size
Wall-Mounted Lighting System					
MLEW584	12.5W	1298	104	4000K	584mm
MLEW864	19W	1947	104	4000K	864mm
MLEW1144	25W	2596	104	4000K	1144mm
MLEW1424	31W	3245	104	4000K	1424mm
MLEW1704	37.5W	3895	104	4000K	1704mm
MLEW1984	44W	4543	104	4000K	1984mm
MLEW2264	50W	5192	104	4000K	2264mm
MLEW2544	56W	5841	104	4000K	2544mm
MLEW2824	62.5W	6490	104	4000K	2824mm
Wall-Mounted Direct/Indirect Lighting System/50% Direct/50% Indirect					
MLEW584/DIR/IND	25W	2270	104	4000K	584mm
MLEW864/DIR/IND	38W	3402	104	4000K	864mm
MLEW1144/DIR/IND	50W	4540	104	4000K	1144mm
MLEW1424/DIR/IND	62W	5674	104	4000K	1424mm
MLEW1704/DIR/IND	74W	6810	104	4000K	1704mm
MLEW1984/DIR/IND	86W	7946	104	4000K	1984mm
MLEW2264/DIR/IND	100W	9080	104	4000K	2264mm
MLEW2544/DIR/IND	112W	10214	104	4000K	2544mm
MLEW2824/DIR/IND	124W	11350	104	4000K	2824mm


NOTE: Includes wall-mounting brackets (longer bespoke lengths available in 140mm increments)

Control Options

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Driver
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/3K	3000K LED
/5K	5000K LED
/RGB	Colour Changing LED
/TW	Tunable White LED

Colour Options

Option Code	Description
/W	White (RAL 9016)
/G	Grey (RAL 9006)
/B	Black (RAL 9005)
/U (POA)	Blue (RAL 5002)
/V (POA)	Green (RAL 6018)
/T (POA)	Yellow (RAL 1021)
/K (POA)	Red (RAL 3020)
/N (POA)	Jungle
/D (POA)	Goldeneye
/O (POA)	Sahara
/L (POA)	Autumn
/R (POA)	Rusty chain
/C (POA)	Pure chocolate
/I (POA)	Mist
/9 (POA)	Darkrock
/I (POA)	Carbon

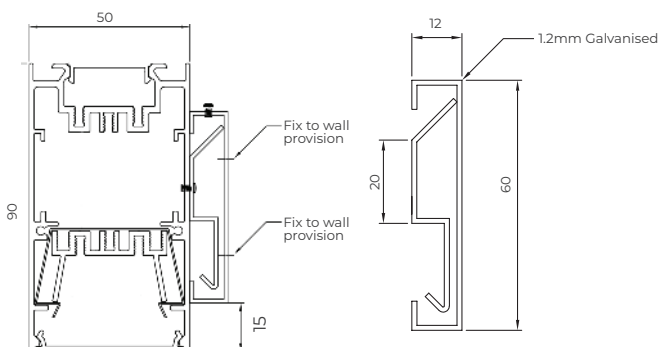

For optional features, please include the option code suffix with the product code when ordering.