

## M-LINE RECESSED SYSTEM




### Construction

The recessed system is available in standard lengths up to 2840mm with bespoke formations and continuous lengths available to order. The standard system is designed for ceiling mounting, however wall mounting systems can be supplied on request. Installation is simple using the easy-fix bracket system.

### Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities, and Residential Properties.

- // Aluminium extruded sections in 9 standard lengths
- // Bespoke lengths available to order in 140mm increments
- // Colour options in 3000/4000/5000K
- // Custom shaped formations subject to design incorporates European branded LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Clip in gear tray for easy installation
- // Opal polycarbonate diffuser
- // Tuneable white and RGB options available
- // Dimmable and emergency options available
- // Compatible with eBlue wireless switching
- // CRI>80, 50,000h life

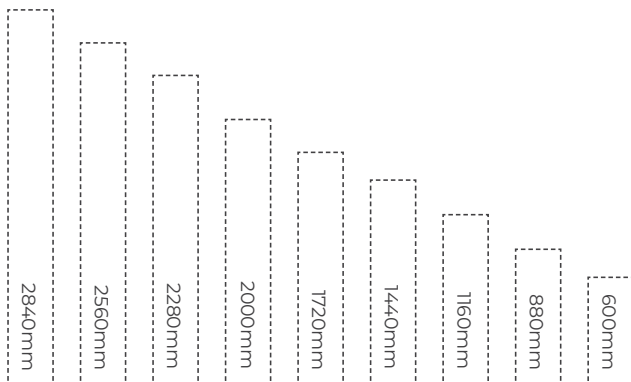

RECESSED CEILING



RECESSED WALL



## M-LINE RECESSED SYSTEM



Typical Recessed Installation



Recessed System

### Recessed System

Product Code	Description	Length	Cut Out Dimensions	Colour Temperature	Lumen Output	LED Wattage
MLER600	Recessed Direct Light Only	600mm	584mm x 52mm	4000K	1135	12
MLER880	Recessed Direct Light Only	880mm	864mm x 52mm	4000K	1702	19
MLER1160	Recessed Direct Light Only	1160mm	1144mm x 52mm	4000K	2270	25
MLER1440	Recessed Direct Light Only	1440mm	1424mm x 52mm	4000K	2837	31
MLER1720	Recessed Direct Light Only	1720mm	1704mm x 52mm	4000K	3405	37
MLER2000	Recessed Direct Light Only	2000mm	1984mm x 52mm	4000K	3973	43
MLER2280	Recessed Direct Light Only	2280mm	2264mm x 52mm	4000K	4540	50
MLER2560	Recessed Direct Light Only	2560mm	2544mm x 52mm	4000K	5107	56
MLER2840	Recessed Direct Light Only	2840mm	2824mm x 52mm	4000K	5675	62


Note: Longer bespoke lengths available in 140mm increments.

### Control Options

Product Code Suffix	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1 - 10v Ballast
/DALI	DALI/DSI Dimmable Ballast
/3K	3000K LED
/5K	5000K LED
RGB	Colour Changing LED

### Colour Options

Product Code Suffix	Description
W	White (RAL 9016)
G	Grey (RAL 9006)
B	Black (RAL 9005)
U (POA)	Blue (RAL 5002)
V (POA)	Green (RAL 6018)
T (POA)	Yellow (RAL 1021)
K (POA)	Red (RAL 3020)
N (POA)	Jungle
D (POA)	Goldeneye
O (POA)	Sahara
L (POA)	Autumn
R (POA)	Rusty chain
C (POA)	Pure chocolate
1 (POA)	Mist
9 (POA)	Darkrock
I (POA)	Carbon



Aperture Size Within Ceiling Void



Fitted Recessed Bracket