

M-LINE WALL-MOUNTED SYSTEM




Construction

The wall-mounted system utilises the same profile as our surface and suspended system and is available in standard lengths up to 2824mm with bespoke lengths available to order. Wall mounting is achieved by directly fixing the supplied bracket to the wall and attaching through the side of the profile. Uplighting is available on lengths from 584mm upwards.

Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Hotels and Leisure Facilities and Residential properties.

- // Aluminium extruded sections in 9 standard lengths
- // Colour options in 3000K/4000K/5000K
- // Incorporates European branded LED drivers
- // Direct/Indirect lighting options available
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Includes wall-mounted brackets
- // Opal polycarbonate diffuser
- // Tuneable white and RGB options available
- // Dimmable and emergency options available
- // Compatible with eBlue wireless switching system
- // Dual Switch option available
- // CRI>80, 50,000h life
- // 5 year warranty

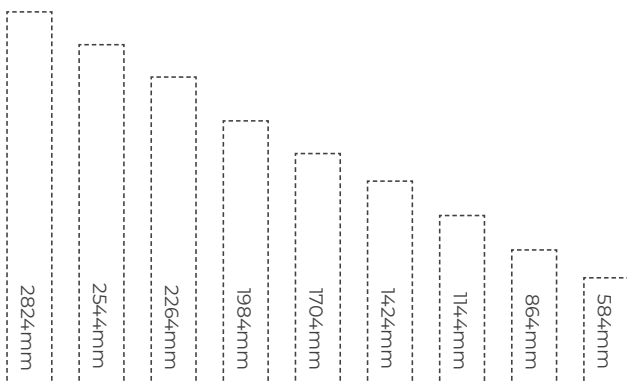

M-LINE WALL-MOUNTED SYSTEM



Product Code	Description	Length	Colour Temperature	Lumen Output	LED Wattage
Wall-Mounted Lighting System					
MLEW584	Wall-Mounted Direct Only	584mm	4000K	1135	12W
MLEW864	Wall-Mounted Direct Only	864mm	4000K	1702	19W
MLEW1144	Wall-Mounted Direct Only	1144mm	4000K	2270	25W
MLEW1424	Wall-Mounted Direct Only	1424mm	4000K	2837	31W
MLEW1704	Wall-Mounted Direct Only	1704mm	4000K	3405	37W
MLEW1984	Wall-Mounted Direct Only	1984mm	4000K	3973	43W
MLEW2264	Wall-Mounted Direct Only	2264mm	4000K	4540	50W
MLEW2544	Wall-Mounted Direct Only	2544mm	4000K	5107	56W
MLEW2824	Wall-Mounted Direct Only	2824mm	4000K	5675	62W
Wall-Mounted Direct/Indirect Lighting System/50% Direct/50% Indirect					
MLEW584/DIR/IND	Surface Direct/Indirect Light	584mm	4000K	2270	25W
MLEW864/DIR/IND	Surface Direct/Indirect Light	864mm	4000K	3402	38W
MLEW1144/DIR/IND	Surface Direct/Indirect Light	1144mm	4000K	4540	50W
MLEW1424/DIR/IND	Surface Direct/Indirect Light	1424mm	4000K	5674	62W
MLEW1704/DIR/IND	Surface Direct/Indirect Light	1704mm	4000K	6810	74W
MLEW1984/DIR/IND	Surface Direct/Indirect Light	1984mm	4000K	7946	86W
MLEW2264/DIR/IND	Surface Direct/Indirect Light	2264mm	4000K	9080	100W
MLEW2544/DIR/IND	Surface Direct/Indirect Light	2544mm	4000K	10214	112W
MLEW2824/DIR/IND	Surface Direct/Indirect Light	2824mm	4000K	11350	124W

NOTE: Includes wall-mounting brackets (longer bespoke lengths available in 140mm increments)

Control Options

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Driver
/DALI	DALI/DSI Dimmable Driver
/3K	3000K LED
/5K	5000K LED
/RGB	Colour Changing LED

Colour Options

Option Code	Description
/W	White (RAL 9016)
/G	Grey (RAL 9006)
/B	Black (RAL 9005)
/U (POA)	Blue (RAL 5002)
/V (POA)	Green (RAL 6018)
/T (POA)	Yellow (RAL 1021)
/K (POA)	Red (RAL 3020)
/N (POA)	Jungle
/D (POA)	Goldeneye
/O (POA)	Sahara
/L (POA)	Autumn
/R (POA)	Rusty chain
/C (POA)	Pure chocolate
/I (POA)	Mist
/9 (POA)	Darkrock
/I (POA)	Carbon

