

M-LINE RECESSED TRIMLESS SYSTEM




Construction

The recessed trimless system is available in standard lengths up to 2824mm with bespoke formations and continuous lengths available to order. The standard system is designed for ceiling mounting, however, wall mounting systems can be supplied on request. Installation is simple using the easy-fix bracket system.

Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities, and Residential Properties.

- // Unique trim enables easy finishing with ceiling
- // Aluminium extruded sections in 9 standard lengths
- // Bespoke lengths available to order in 140mm increments
- // Colour options in 3000K/4000K/5000K
- // Custom shaped formations available subject to design
- // Incorporates European branded LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Clip-in gear tray for easy installation
- // Opal polycarbonate diffuser
- // Tuneable white and RGB options available
- // Dimmable and emergency options available
- // Compatible with eBlue wireless switching
- // CRI>80, 50,000h life
- // 5 year warranty

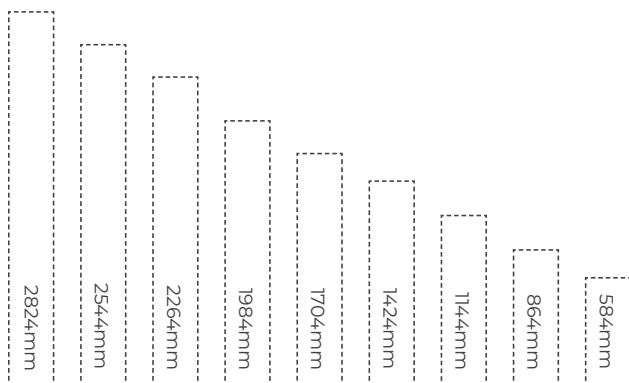


RECESSED CEILING




RECESSED WALL



M-LINE RECESSED TRIMLESS SYSTEM

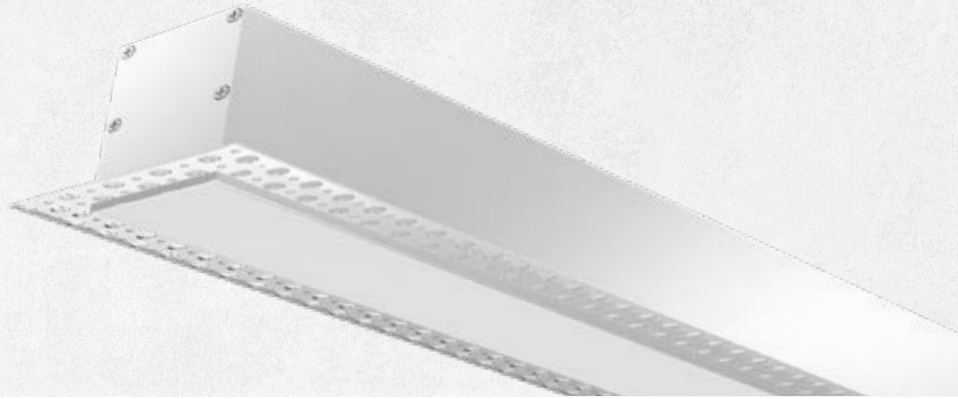



Typical Recessed Installation

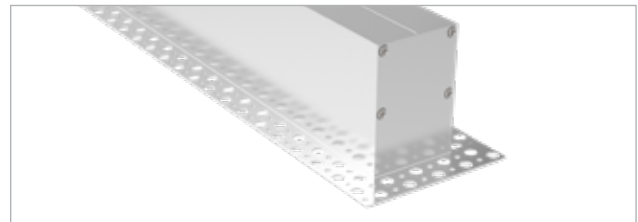

Recessed System

Product Code	Description	Length	Cutout Dimensions	Colour Temperature	Lumen Output	LED Wattage
Recessed Trimless System						
MLERT584	Recessed Direct Light Only	584mm	584mm x 52mm	4000K	1135	12W
MLERT864	Recessed Direct Light Only	864mm	864mm x 52mm	4000K	1702	19W
MLERT1144	Recessed Direct Light Only	1144mm	1144mm x 52mm	4000K	2270	25W
MLERT1424	Recessed Direct Light Only	1424mm	1424mm x 52mm	4000K	2837	31W
MLERT1704	Recessed Direct Light Only	1704mm	1704mm x 52mm	4000K	3405	37W
MLERT1984	Recessed Direct Light Only	1984mm	1984mm x 52mm	4000K	3973	43W
MLERT2264	Recessed Direct Light Only	2264mm	2264mm x 52mm	4000K	4540	50W
MLERT2544	Recessed Direct Light Only	2544mm	2544mm x 52mm	4000K	5107	56W
MLERT2824	Recessed Direct Light Only	2824mm	2824mm x 52mm	4000K	5675	62W

NOTE: Longer bespoke lengths available in 140mm increments.

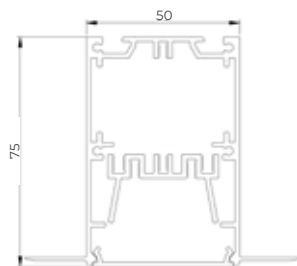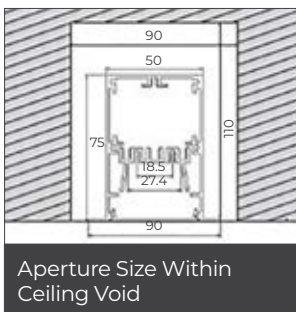

Control Options

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Driver
/DALI	DALI/DSI Dimmable Driver
/3K	3000K LED
/5K	5000K LED
/RGB	Colour Changing LED