

OREO






Construction

The Oreo is designed to be suspended in horizontal or vertical format to a central surface or flush ceiling rose. Available in five different sizes and a wide variety of colours. It is an ideal option when lighting an open space or simply wanting to create a stunning feature. The versatility of the aluminium body and LED technology used allows for the inclusion of many control options, including dimming and wireless switching options.

Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities.


- // Decorative suspended LED luminaire
- // Available in multiple rings to create custom luminaire
- // European branded LED drivers
- // LED 4000K, CRI>90, 60,000h life
- // Option for 2700K
- // Up to 93 lumens per circuit watt
- // In/out versions in horizontal and vertical suspension
- // 650mm, 950mm, 1250mm, 1550mm, 1950mm diameter body
- // Extruded aluminium body available in 16 colours
- // Colour-matching flush or surface ceiling rose
- // Opal polycarbonate diffuser
- // Compatible with Casambi wireless control system
- // 5-year warranty

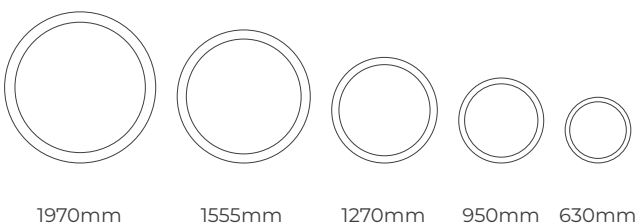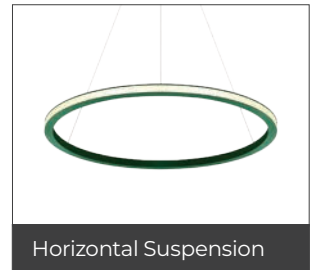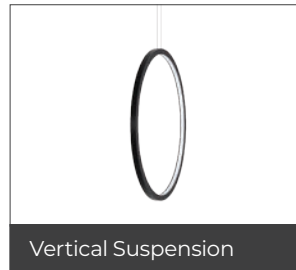

OREO

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Size
ORE28/IN	28W	2600	93	4000K	Ø 650mm x H 35mm
ORE42/IN	42W	3900	93	4000K	Ø 970mm x H 35mm
ORE54/IN	54W	5070	93	4000K	Ø 1255mm x H 35mm
ORE67/IN	67W	6240	93	4000K	Ø 1540mm x H 35mm
ORE85/IN	85W	7930	93	4000K	Ø 1955mm x H 35mm
ORE25/OUT	25W	2340	93	4000K	Ø 630mm x H 35mm
ORE39/OUT	39W	3640	93	4000K	Ø 950mm x H 35mm
ORE53/OUT	53W	4940	93	4000K	Ø 1270mm x H 35mm
ORE65/OUT	65W	6110	93	4000K	Ø 1555mm x H 35mm
ORE83/OUT	83W	7800	93	4000K	Ø 1970mm x H 35mm
ORE28/V/IN	28W	2600	93	4000K	Ø 650mm x H 35mm
ORE42/V/IN	42W	3900	93	4000K	Ø 970mm x H 35mm
ORE54/V/IN	54W	5070	93	4000K	Ø 1255mm x H 35mm
ORE67/V/IN	67W	6240	93	4000K	Ø 1540mm x H 35mm
ORE85/V/IN	85W	7930	93	4000K	Ø 1955mm x H 35mm
ORE25/V/OUT	25W	2340	93	4000K	Ø 630mm x H 35mm
ORE39/V/OUT	39W	3640	93	4000K	Ø 950mm x H 35mm
ORE53/V/OUT	53W	4940	93	4000K	Ø 1270mm x H 35mm
ORE65/V/OUT	65W	6110	93	4000K	Ø 1555mm x H 35mm
ORE83/V/OUT	83W	7800	93	4000K	Ø 1970mm x H 35mm




Size Options

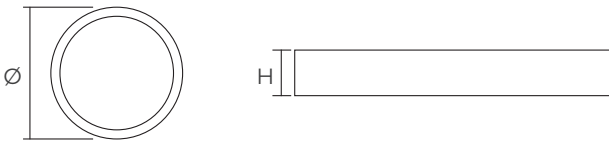

Control Options

Option Code	Description
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable

Suspension Options

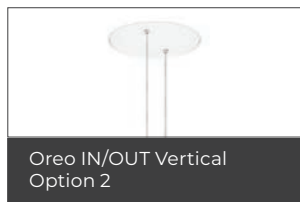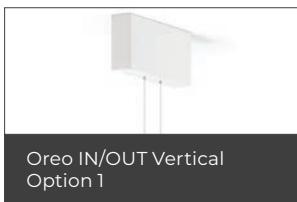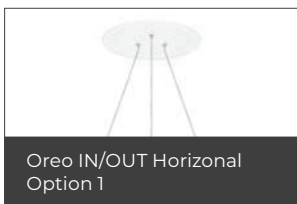

Colour Options

Option Code	Description
/W	White (RAL 9016)
/G	Grey (RAL 9006)
/B	Black (RAL 9005)
/U (POA)	Blue (RAL 5002)
/V (POA)	Green (RAL 6018)
/T (POA)	Yellow (RAL 1021)
/K (POA)	Red (RAL 3020)
/N (POA)	Jungle
/D (POA)	Goldeneye
/O (POA)	Sahara
/L (POA)	Autumn
/R (POA)	Rusty chain
/C (POA)	Pure chocolate
/I (POA)	Mist
/9 (POA)	Darkrock
/I (POA)	Carbon

For optional features, please include the option code suffix with the product code when ordering.