

VELO

Low Glare LED Downlight

- // Supports UGR19 compliance
- // Aluminium body
- // 60 degree beam angle
- // 3000K option
- // Available in 18w, 25w or 35w
- // High light output - up to 3600 lumens
- // Interior use
- // CRI>80
- // IP54
- // Complete with driver
- // 5-year warranty




Construction

Our Velo range of LED downlights has been selected for use in recessed applications and can be mounted into suspended or plasterboard ceilings. The powder-coated aluminium body provides corrosion resistance and excellent heat dissipation. The high-quality deep reflector has a good reflective rate and is suitable for UGR19 applications.

Typical Applications

Amenity, Tea-Points, Canteens, Receptions, Corridors and General Office Areas.

Size Options

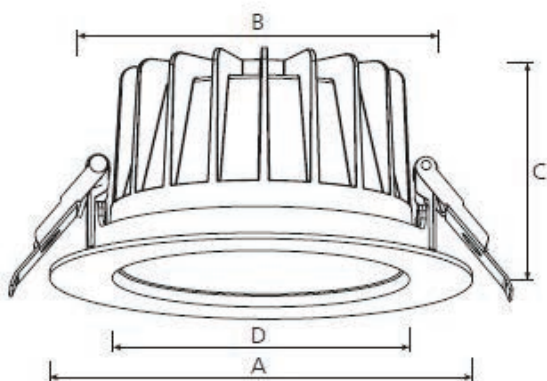

Product Code	Size A	Size B	Size C	Size D
VLO18	Ø 172mm	Ø145mm	H 90mm	Ø127mm
VLO25	Ø 172mm	Ø145mm	H 90mm	Ø127mm
VLO35	Ø 228mm	Ø195mm	H 99mm	Ø176mm



Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature
VLO18	17W	2103	124	4000K
VLO25	24W	2840	117	4000K
VLO35	34W	3777	112	4000K

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Dimmable Driver
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/3K	3000K LED

For optional features, please include the option code suffix with the product code when ordering.