

## BLAZE


### High-End Mini Linear Downlight

- // IP44 luminaire with a wide variety of options
- // Samsung high-power, high-efficiency LEDs
- // Extruded aluminium super-fin heatsink
- // Injection moulded low glare matt-black baffle
- // High clarity 30° medium beam lens
- // Ultra-slim clean-line bezel
- // Life up to >60,000 hours L80/F50
- // European branded LED driver
- // Short circuit, overload and temperature protection
- // LSF 500mm mains lead
- // Adjustable version available
- // CRI>90
- // 5-year warranty
- // Manufactured in UK



Product Code	Lens	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Dimensions (mm)	Cutout
BLZ5/7	5x	7W	525	78	4000K	L 175 x W 50 x H 62	166 x 41mm
BLZ5/13	5x	13W	1049	78	4000K	L 175 x W 50 x H 62	166 x 41mm
BLZ10/13	10x	13W	1049	78	4000K	L 330 x W 50 x H 62	323 x 41mm
BLZ10/23	10x	23W	2099	92	4000K	L 330 x W 50 x H 62	323 x 41mm

### Technical Drawing



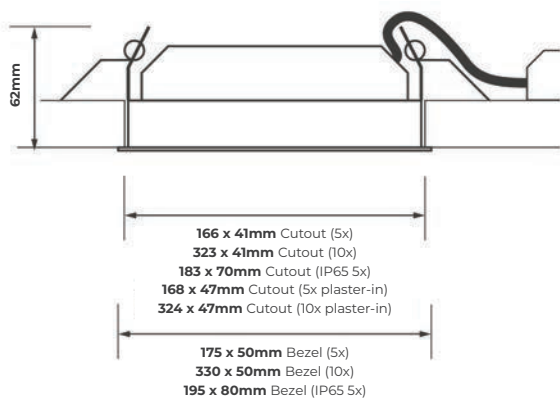


Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour DALI Maintained Emergency
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/IP65	IP65 (5X Lens Only)
/3K	3000K (Warm White)
/WB	White Baffle
/GB	Gold Baffle
/9005	Black Bezel
/9006	Grey Bezel
/TR	Plaster-in Trimless Bezel
/N	15° Narrow Beam Lens
/W	50° Wide Beam Lens
/SN	10° Super Narrow Beam Lens
Product Variation (state required specification)	

For optional features, please include the option code suffix with the product code when ordering.

## BLAZE - OPTIONS AND ACCESSORIES

### Options

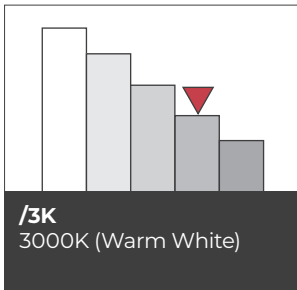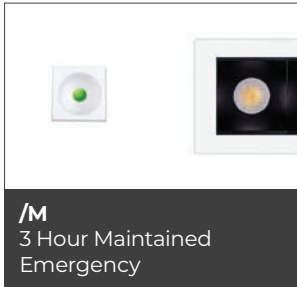

### Product Variations

