

## FLARE


### Low-Glare Architectural Downlight

- // Discreet minimal bezel, die-cast from pure aluminium
- // Matt black darklight baffle, developed to minimise glare
- // Fitted with an integral IP44 protective lens as standard
- // Precision moulded 40° reflector
- // Tridonic LED engine and driver system
- // Excellent thermally optimised 24 super-fin die-cast heatsink
- // Short circuit, overload and temperature protection
- // Emergency and DALI dimming options
- // Life up to >50,000 hours (L80/F10)
- // CRI>80 as standard, CRI>90 option available
- // 5-year warranty
- // Manufactured in UK



Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature
FLR8/3K	6W	593	89	3000K
FLR8	6W	627	94	4000K
FLR10/3K	8W	767	94	3000K
FLR10	8W	811	99	4000K


### Technical Drawing

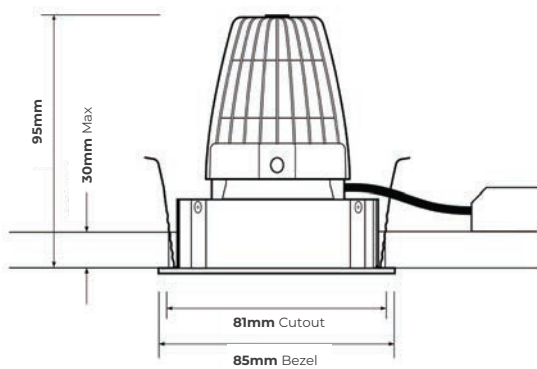

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour DALI Maintained Emergency
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/CRI90	CRI>90
/TR	Plaster-in Trimless Bezel
/WB	White Baffle
/NB	20° Narrow Beam Reflector
Product Variation (state required specification)	

## FLARE - OPTIONS AND ACCESSORIES

### Options



### Product Variations



For optional features, please include the option code suffix with the product code when ordering.