


## CIRC

### Slimline LED Downlight

- // Ideal replacement for compact fluorescent downlights
- // Three sizes available to suit either 105mm, 160mm or 210mm cutouts
- // Available in three wattages
- // Up to 82 lumens per circuit watt
- // CRI>80
- // PF 0.9
- // Complete with driver
- // 5 year warranty

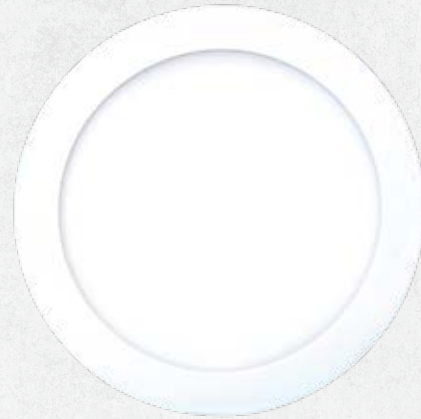

### Construction


Our Circ range of LED downlights has been designed as an ideal replacement for compact fluorescent downlights and is sized to suit the more common cutout sizes. The panel surround and heat sink is manufactured using white powder-coated die-cast aluminium material.

The diffuser is manufactured using high-impact resistant acrylic PMMA material. The Circ is supplied complete with a simple plug and play connector for the low voltage connections to aid a speedy installation. As standard, the unit is supplied in 4000K.

### Typical Applications

Toilets, Corridors, General Office Areas, Conference Rooms, Reception Areas, Retail and Leisure Facilities.

### Size Options

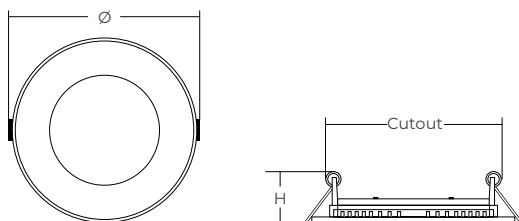

Size A	Size B	Size C
∅ 120mm	∅ 172mm	∅ 225mm
H 25mm	H 25mm	H 25mm
Cutout 105mm	Cutout 160mm	Cutout 210mm

Product Code	LED Wattage	Lumen Output	Colour Temperature	Size
CIR6	6W	470	4000K	A
CIR12	12W	930	4000K	B
CIR18	18W	1450	4000K	C

Option Code	
/D	1-10V Dimmable Driver
/DALI	DALI/DSI Dimmable Driver
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency

For optional features, please include the option code suffix with the product code when ordering.