

## CORONA




### Construction

The Corona is designed to be surface mounted or suspended to a single suspension point. Available in 4 different sizes and a wide variety of RAL colours. It is the ideal option when lighting a large open space or simply wanting to create a stunning feature. The versatility of the aluminium body and LED technology used allows for inclusion of many control options including dimming, emergency options, wireless switching and scene-setting eBlue technology.

- // Decorative surface or suspended LED luminaire
- // European branded LED drivers
- // Up to 124 lumens per circuit watt
- // Direct/Indirect option available - 70:30 ratio
- // Extruded aluminium body available in 16 colours
- // Colour match ceiling rose
- // 400mm, 600mm, 900mm and 1150mm diameter
- // LED 4000K, CRI>80, 50,000h life
- // Opal polycarbonate diffuser
- // Compatible with eBlue wireless switching system
- // 5 year warranty

### Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities, and Residential Properties.

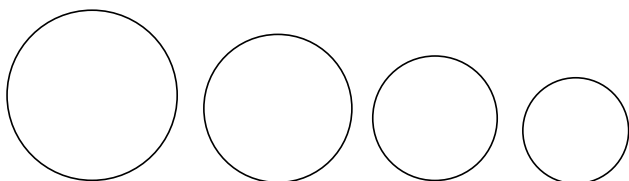

1150mm

900mm

600mm

400mm

SURFACE



SUSPENDED



## CORONA

Product Code	Description	Dimensions	Optic Option	Colour Temperature	Lumen Output	LED Wattage	Lumen/Watt
<b>Corona Surface or Suspended Direct Lighting</b>							
CRA34	Corona Surface/Suspended LED	400 x 85mm	Opal	4000K	3276	36W	91
CRA59	Corona Surface/Suspended LED	600 x 85mm	Opal	4000K	5452	47W	116
CRA75	Corona Surface/Suspended LED	900 x 85mm	Opal	4000K	7956	68W	117
CRA89	Corona Surface/Suspended LED	1150mm x 85mm	Opal	4000K	13020	105W	124
<b>Corona Suspended Direct/Indirect - 70%/30%</b>							
CRA59/DIR/IND	Corona Suspended Direct/Indirect	600 x 85mm	Opal	4000K	6696	72W	93
CRA75/DIR/IND	Corona Suspended Direct/Indirect	900 x 85mm	Opal	4000K	10506	103W	102
CRA89/DIR/IND	Corona Suspended Direct/Indirect	1150mm x 85mm	Opal	4000K	16854	159W	106

### Control Options

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Driver
/DALI	DALI/DSI Dimmable Driver
/3K	3000K LED

### Suspension Options

Option Code	Description
<b>Ceiling Rose with Central Suspension Point (Including 1.5m wires)</b>	
CR1	Ceiling Rose for 400, 600, 900 and 1150mm versions.
Colour matched Ceiling Rose supplied unless specified otherwise	
<b>Vertical Suspension Sets (Including 1.5m wires)</b>	
SUSKIT -T1	Vertical Suspension Kit for 400, 600 and 900mm versions
<b>Ceiling Rose for Vertical Suspension (Excluding wires)</b>	
CRO	Ceiling Rose with Vertical Suspension Sets
<b>Supply Cable</b>	
CABTR3C	1.5m Transparent Current Cable 3 x0.75mm <sup>2</sup>
CABTR5C	1.5m Transparent Current Cable 5 x0.75mm <sup>2</sup>
<b>NOTE:</b> Alternative length suspension kits available - POA	

### Colour Options

Option Code	Description
/W	White (RAL 9016)
/G	Grey (RAL 9006)
/B	Black (RAL 9005)
/U (POA)	Blue (RAL 5002)
/V (POA)	Green (RAL 6018)
/T (POA)	Yellow (RAL 1021)
/K (POA)	Red (RAL 3020)
/N (POA)	Jungle
/D (POA)	Goldeneye
/O (POA)	Sahara
/L (POA)	Autumn
/R (POA)	Rusty chain
/C (POA)	Pure chocolate
/1 (POA)	Mist
/9 (POA)	Darkrock
/I (POA)	Carbon



CR1



SUSKIT -T1



CABTR3C



CABTR5C



CRO



Direct/Indirect