

## M-LINE RECESSED SYSTEM




### Construction

The recessed system is available in standard lengths up to 2840mm with bespoke formations and continuous lengths available to order. The standard system is designed for ceiling mounting, however, wall mounting systems can be supplied on request. Installation is simple using the easy-fix bracket system.

### Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities, and Residential Properties.

- // Aluminium extruded sections in 9 standard lengths
- // Bespoke lengths available to order in 140mm increments
- // Colour options in 3000K/4000K/5000K
- // Custom shaped formations subject to design
- // Incorporates European branded LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Clip-in gear tray for easy installation
- // Opal polycarbonate diffuser
- // Tuneable white and RGB options available
- // Dimmable and emergency options available
- // Compatible with eBlue wireless switching
- // CRI>80, 50,000h life
- // 5 year warranty

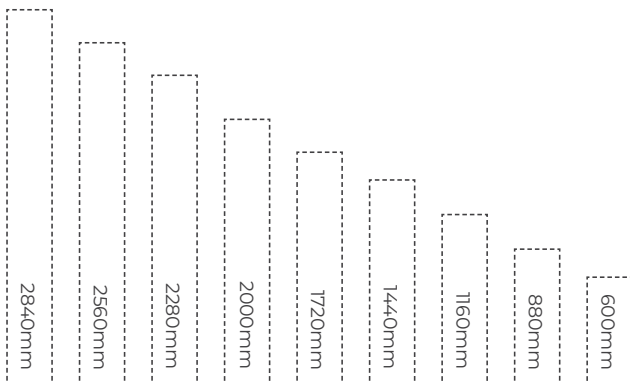

RECESSED CEILING




RECESSED WALL



## M-LINE RECESSED SYSTEM



Typical Recessed Installation

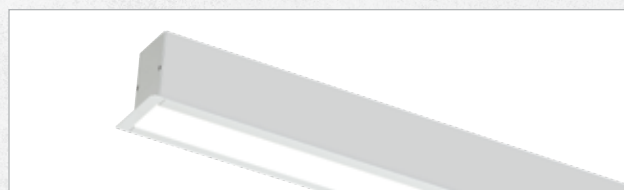


Recessed System

Product Code	Description	Length	Cutout Dimensions	Colour Temperature	Lumen Output	LED Wattage
<b>Recessed System</b>						
MLER600	Recessed Direct Light Only	600mm	584mm x 52mm	4000K	1135	12W
MLER880	Recessed Direct Light Only	880mm	864mm x 52mm	4000K	1702	19W
MLER1160	Recessed Direct Light Only	1160mm	1144mm x 52mm	4000K	2270	25W
MLER1440	Recessed Direct Light Only	1440mm	1424mm x 52mm	4000K	2837	31W
MLER1720	Recessed Direct Light Only	1720mm	1704mm x 52mm	4000K	3405	37W
MLER2000	Recessed Direct Light Only	2000mm	1984mm x 52mm	4000K	3973	43W
MLER2280	Recessed Direct Light Only	2280mm	2264mm x 52mm	4000K	4540	50W
MLER2560	Recessed Direct Light Only	2560mm	2544mm x 52mm	4000K	5107	56W
MLER2840	Recessed Direct Light Only	2840mm	2824mm x 52mm	4000K	5675	62W


**NOTE:** Longer bespoke lengths available in 140mm increments.

### Control Options

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Driver
/DALI	DALI/DSI Dimmable Driver
/3K	3000K LED
/5K	5000K LED
RGB	Colour Changing LED

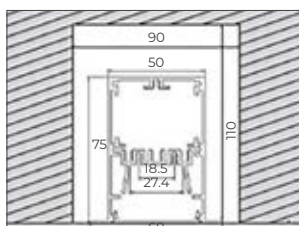

Aperture Size Within Ceiling Void

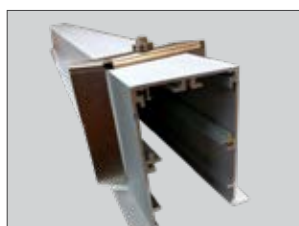

Fitted Recessed Bracket

### Colour Options

Option Code	Description
/W	White (RAL 9016)
/G	Grey (RAL 9006)
/B	Black (RAL 9005)
/U (POA)	Blue (RAL 5002)
/V (POA)	Green (RAL 6018)
/T (POA)	Yellow (RAL 1021)
/K (POA)	Red (RAL 3020)
/N (POA)	Jungle
/D (POA)	Goldeneye
/O (POA)	Sahara
/L (POA)	Autumn
/R (POA)	Rusty chain
/C (POA)	Pure chocolate
/I (POA)	Mist
/9 (POA)	Darkrock
/I (POA)	Carbon