

ORBIT


High-Performance LED Downlight

- // Low glare <UGR19 for LG7 compliance
- // 60° satin-etched reflector
- // Die-cast twist and lock bezel with interchangeable accessories
- // Optimised thermal management system
- // IP54 and IP65 bezel options
- // Emergency and DALI dimming options
- // Life up to >60,000 hours (L70 / B10)
- // Lumen maintenance L80/F10 @ 50,000 hours
- // Available in two system performance levels
- // CRI>80
- // 5-year warranty
- // Manufactured in UK



Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature
ORB10/3K	10W	1009	105	3000K
ORB10	10W	1090	112	4000K
ORB18/3K	18W	1743	100	3000K
ORB18	18W	1889	109	4000K
ORB31/3K	31W	2677	88	3000K
ORB31	31W	2902	95	4000K

Technical Drawing

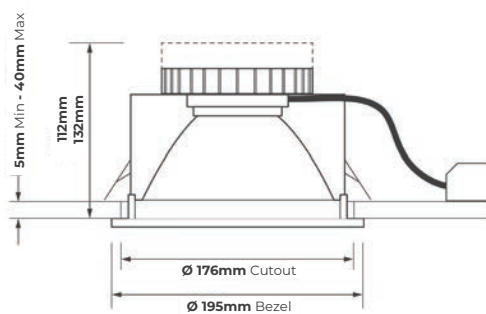

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour DALI Maintained Emergency
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/BW	Bezel - Brilliant White (RAL9016)
/WH	Bezel - White (RAL9010)
/BL	Bezel - Black (9005)
/GR	Bezel - Grey (9006)
/IM	Integral Emergency Indicator
/MF50	50° Multi-Faceted Reflector
/SP40	40° Specular Reflector
/IP65	IP65
/IP54	IP54
Product Variation (state required specification)	

ORBIT - OPTIONS AND ACCESSORIES

Options



/M
3 Hour Maintained
Emergency



/MZ
3 Hour DALI
Maintained Emergency



/BTC
Casambi Dimmable



/BW
Bezel - Brilliant White
(RAL9016)



/WH
Bezel - White (RAL9010)



/BL
Bezel - Black (9005)



/GR
Bezel - Grey (9006)



/IM
Integral Emergency
Indicator



/MF50
50° Multi-Faceted
Reflector



/SP40
40° Specular Reflector



/IP65
IP65



/IP54
IP54

For optional features, please include the option code suffix with the product code when ordering.