

QUANTUM


Low-Glare Architectural Downlight

- // Matt black darklight baffle to minimise glare
- // Emergency and DALI dimming option
- // IP44 protective lens
- // Precision moulded 40° reflector
- // Thermally optimised die-cast heatsink
- // Tridonic LED engine and driver system
- // Short circuit, overload and temperature protection
- // Life up to >55,000 hours (L70/F10)
- // Round option available (See Flare)
- // Compatible with Casambi wireless switching system
- // CRI>80
- // 5-year warranty
- // Manufactured in UK



Product Code	Lens	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Dimensions (mm)	Cutout (mm)
QTM1/8/3K	1x	6W	593	96	3000K	85 x 85 x 95	81 x 81
QTM1/8	1x	6W	627	102	4000K	85 x 85 x 95	81 x 81
QTM1/10/3K	1x	8W	767	94	3000K	85 x 85 x 95	81 x 81
QTM1/10	1x	8W	811	99	4000K	85 x 85 x 95	81 x 81
QTM2/17/3K	2x	12W	1186	96	3000K	154 x 85 x 95	145 x 77
QTM2/17	2x	12W	1253	102	4000K	154 x 85 x 95	145 x 77
QTM2/21/3K	2x	16W	1534	94	3000K	154 x 85 x 95	145 x 77
QTM2/21	2x	16W	1624	99	4000K	154 x 85 x 95	145 x 77
QTM3/25/3K	3x	18.5W	1779	96	3000K	222 x 85 x 95	213 x 77
QTM3/25	3x	18.5W	1880	102	4000K	222 x 85 x 95	213 x 77
QTM3/31/3K	3x	25W	2302	94	3000K	222 x 85 x 95	213 x 77
QTM3/31	3x	25W	2432	99	4000K	222 x 85 x 95	213 x 77



Technical Drawing

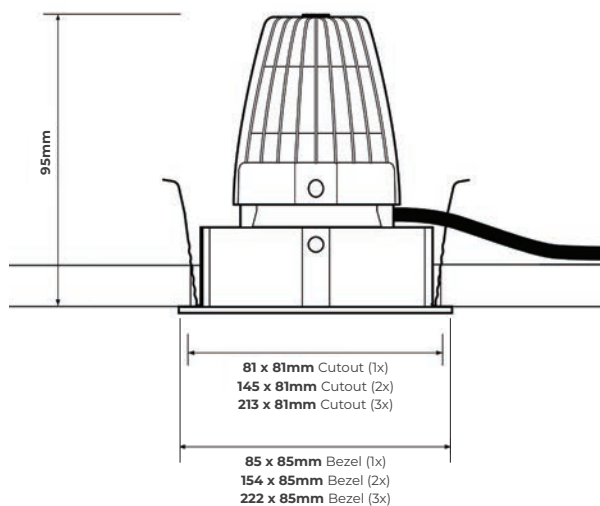


Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour DALI Maintained Emergency
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/TR	Plaster-in Trimless Bezel
/WB	White Baffle
Product Variation (state required specification)	

QUANTUM - OPTIONS AND ACCESSORIES

Options



Product Variations



For optional features, please include the option code suffix with the product code when ordering.