

## SONIC


### High-Performance Low Glare Downlight

- // Low glare UGR<19
- // Emergency and DALI dimming option
- // Incorporates Philips LED module and driver system
- // Multi-faceted 40° reflector supplied as standard
- // Height under 100mm using optimised passive thermodynamics
- // Life up to >50,000 hours (L80/B10)
- // ECA and Part L compliant variants
- // CRI>80 as standard, Ra90 optional
- // 5-year warranty
- // Manufactured in UK



Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature
SON6	8W	1050	131	4000K
SON12	14W	1825	135	4000K
SON18	19W	2525	133	4000K
SON27	27W	3375	125	4000K



### Technical Drawing

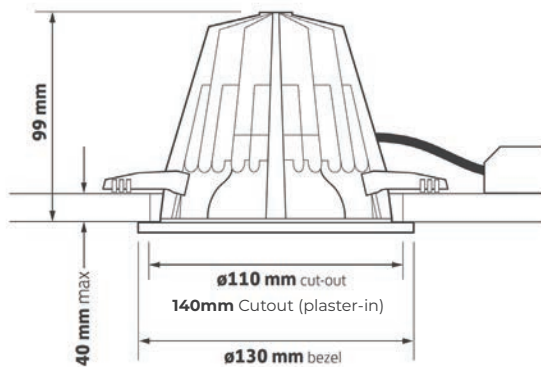

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour DALI Maintained Emergency
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/CRI90	CRI>90
/BW	Bezel - Brilliant White (RAL9016)
/WH	Bezel - White (RAL9010)
/CH	Bezel - Chrome
/BA	Bezel - Brushed Aluminium
/BL	Bezel - Black (RAL9005)
/IP54	IP54 Glass
/IP65	IP65 Bezel + Clear Poly
/MF25	25° Multi-Faceted Reflector
/MF60	60° Multi-Faceted Reflector
/SP40	40° Specular Reflector
/SA50	50° Satin Reflector
/TR	Plaster-in Trimless Bezel
/3K	3000K (Warm White)

## SONIC - OPTIONS AND ACCESSORIES

### Options

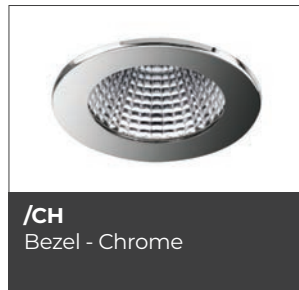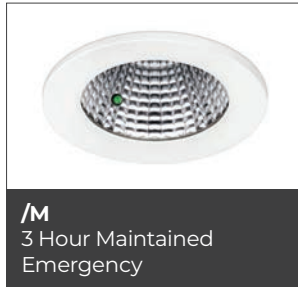

For optional features, please include the option code suffix with the product code when ordering.