


SPARK

Mini Architectural Pinhole Style Downlight

- // Tridonic SLE advanced LED engine
- // Lumen maintenance >55,000 hours (L70/F10)
- // 40° reflector as standard, 20° option
- // Die-cast bezel RAL 9016 white
- // Matt black anti-glare baffle
- // Citizen 1150 lm LED engine
- // Wide choice of options and accessories
- // Wireless, DALI dimming and emergency options
- // CRI>80
- // 5-year warranty
- // Manufactured in the UK

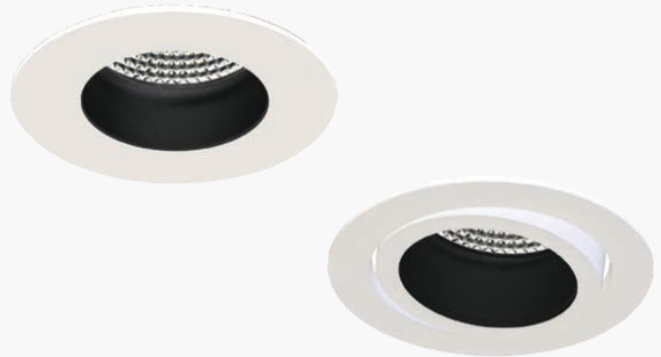

Construction


Our Spark luminaire is a low glare architectural LED pinhole downlight, powered by Tridonic LEDs.

The smallest in our range, this pinhole-style minimalist architectural downlight offers low glare illumination for numerous applications.

Typical Applications

Hospitality, Tea Points, Seating, Reception and Leisure Areas.

Technical Drawing

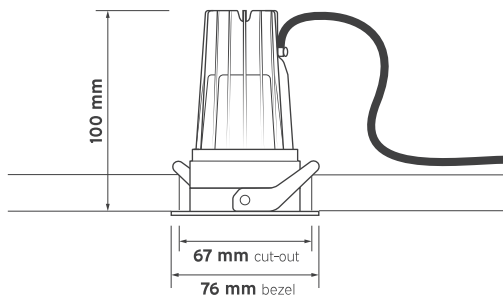

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Beam Angle
SPK6/3K	6W	390	64	3000K	40°
SPK6	6W	413	67	4000K	40°
SPK8/3K	8W	500	61	3000K	40°
SPK8	8W	529	65	4000K	40°
SPK10	10W	496	50	4000K	40°
SOK15/3K	15W	669	44	3000K	40°

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour DALI Maintained Emergency
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/T	Adjustable Body
/9005	Black Body
/T/9005	Adjustable Body - Black
/WB	White Baffle
/GB	Gold Baffle
/IP54	IP54 Ribbed Glass
/H	Honeycomb Louvre
/NB	20° Beam Reflector
/T	CRI>90 (light output -15%)
/T95	CRI>95 (light output -25%)

For optional features, please include the option code suffix with the product code when ordering.

SPARK - OPTIONS AND ACCESSORIES


Options



/M
3 Hour Maintained
Emergency



/MZ
3 Hour DALI Maintained
Emergency

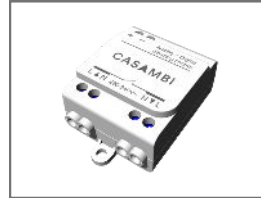

/BTC
Casambi Dimmable



/T
Adjustable Body



/9005
Black Body



/T/9005
Adjustable Body - Black



/WB
White Baffle




/GB
Gold Baffle



/IP54
IP54 Ribbed Glass



/H
Honeycomb Louvre

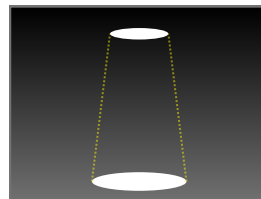

/NB
20° Beam Reflector