

FLOWLED I

High-Output High-Performance LED Low-Bay Luminaire

- // Highly effective sealed LED solution
- // Presence detection options available
- // Up to 125 lumens per circuit watt
- // European branded LED driver
- // Emergency options available
- // 5-12m mounting height
- // IP20 as standard, IP54 and IP65 options available
- // Available in 3000K and 5000K options
- // Universal mounting bracket for surface and conduit mounting available
- // CRI>80
- // 5-year warranty




Construction

The FlowLED low-bay luminaire is designed to be very effective and energy efficient. The luminaire body is laser profiled steel and white powder-coated finish. The diffuser is a light opal satin acrylic. The luminaire is supplied with a universal mounting bracket suitable for surface mounting or by chain suspension, mounting on lighting trunking and directly onto conduit BESA boxes. As standard, the luminaire utilises branded electronic control gear from major manufacturers.

Typical Applications

Warehouses, Production Facilities and Sports Halls.

Size Options

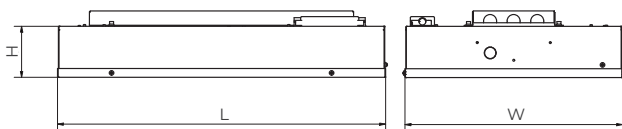

Size A	Size B	Size C
L 560mm	L 560mm	L 685mm
H 87mm	H 87mm	H 87mm
W 270mm	W 370mm	W 445mm

For optional features, please include the option code suffix with the product code when ordering.



Trunking Bracket

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Size
FLW72/4K	72W	8730	121	4000K	A
FLW108/4K	108W	13070	121	4000K	B
FLW144/4K	144W	17500	121	4000K	B
FLW180/4K	180W	22200	123	4000K	C
FLW210/4K	210W	26278	125	4000K	C

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Dimmable Driver
/BTC	Casambi Dimmable
/P	Presence Detection
/PCF	Dimmable Presence Detection
/P8M	Long Range Presence Detection
/PCF8M	Dimmable Long Range Presence Detection
/IP54	IP54 Version
/IP65	IP65 Version
/3K	3000K LED
/5K	5000K LED
/FLW/TBRK	Trunking Bracket