

## T-LINE 60MM

### Decorative Suspended LED Tube

- // Available in multiple lengths
- // Colour options in 3000K/4000K/5000K
- // Custom shapes available subject to design
- // Incorporates European branded LED drivers
- // Up to 125 lumens per circuit watt
- // Opal polycarbonate diffuser
- // Tuneable white and RGBW options available
- // Dimmable and emergency options available
- // CRI>80, 50,000h life
- // End caps can be finished in your choice of colour
- // Compatible with Casambi wireless control system
- // 5-year warranty




### Construction

Our T-Line range uses an opal tubular polycarbonate diffuser with a hidden aluminium spine to suspend the luminaire. Control gear is mounted in a white surface control box with rear and side conduit entries. The plastic end caps are white as standard but can be finished in colours of your choice.

### Typical Applications

Receptions, Meeting Rooms, General Office Areas, Task Areas, Educational Facilities, Retail Units, Supermarkets, and Hospitals.

### Size Options

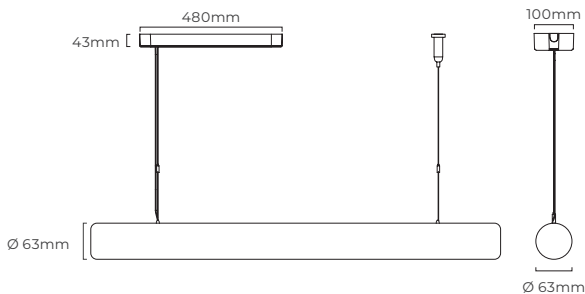

Size		
<b>Control Box</b>		
L 480mm	H 43mm	W 100mm
<b>T-Line</b>		
L 595mm		Ø 63mm



Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temp.	Size
TLE595	13W	1626	125	4000K	595mm
TLE875	19W	2439	125	4000K	875mm
TLE1155	26W	3252	125	4000K	1155mm
TLE1435	32W	4065	125	4000K	1435mm
TLE1715	39W	4878	125	4000K	1715mm
TLE1995	45W	5691	125	4000K	1995mm
TLE2275	52W	6504	125	4000K	2275mm

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/3K	3000K LED
/5K	5000K LED
/RGB	Colour Changing LED
/TW	Tunable White LED



For optional features, please include the option code suffix with the product code when ordering.