



LED

Norms: EN 60598-1, EN 60598-2-2



PRODUCT DESCRIPTION

Areas of Application: Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

Mounting: Suspended.

Light Distribution: Direct.

Light Source: LED 4000K, CRI>80, 75.000h life (@L90, B10, Ta 25 °C).

Optical System: Lens in PMMA and Polycarbonate Diffuser.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Steel sheet and extruded aluminium tube.

Surface Finish: Powder coated.

S8 /E - Recessed ceiling rose



LED	UGR	W	Lm	Lm/W	η(%)	AxBxCxD(mm)	∅	kg	ORDER CODE
≤16	20	1920	91	95	∅30x150x130x71	∅112	3,2	90101.L150.E	
≤16	20	1920	91	95	∅30x300x130x71	∅112	4,3	90101.L300.E	
≤16	20	1920	91	95	∅30x450x130x71	∅112	5,3	90101.L450.E	
≤16	20	1920	91	95	∅30x600x130x71	∅112	6,5	90101.L600.E	

S8 /C - Surface mounted ceiling rose



LED	UGR	W	Lm	Lm/W	η(%)	AxBxCxD(mm)	∅	kg	ORDER CODE
≤16	20	1920	91	95	∅30x150x120x55	-	2,7	90099.L150.E	
≤16	20	1920	91	95	∅30x300x120x55	-	4,0	90099.L300.E	
≤16	20	1920	91	95	∅30x450x120x55	-	5,0	90099.L450.E	
≤16	20	1920	91	95	∅30x600x120x55	-	6,0	90099.L600.E	

- To complete the product add optical system. Please order separately.
- The technical data represent rated values for an 47° optic lens.

Example code for order: 90099.L150.E(ORDER CODE) + W(COLOUR/FINISH) + 926200 + 941701 + 926210 + 2000 (OPTIONS)


We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

COLOUR / FINISH


Code	Description
W	White
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red
0	Sahara
L	Autumn
D	Golden eye
R	Rusty chain
C	Pure chocolate
N	Jungle
1	Mist
9	Dark rock
I	Carbon

DIMENSIONS

Recessed ceiling rose version

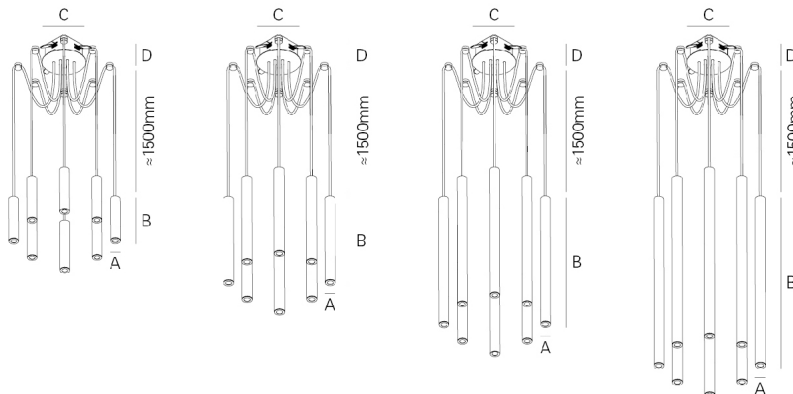

Surface mounted ceiling rose version

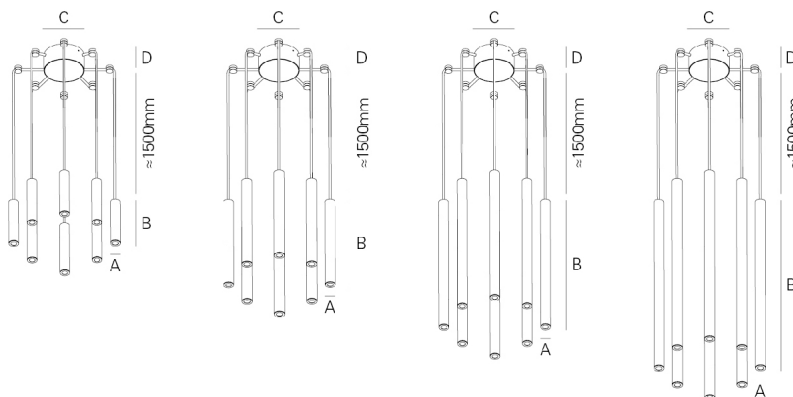

OPTIONS

Optical system



14 Lens
47 Lens
Oval Lens

Order Code
926200
926201
926202

Colour temperature



2700K

Order Code
2000


Transparent ceiling holder



Transparent holder

Order Code
926210

Current cable



Orange fabric cable 2,5 m
Black fabric cable 2,5 m
Brown fabric cable 2,5 m

Order Code
941701
941801
941901

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.


DETAILS



14 optical lens light effect



47 optical lens light effect



Light effect with oval lens



Lens fixing system detail

TO SPECIFY:

Eight modules LED luminaire each module with 30 mm diameter and possibility of different types of recessed or surface ceiling rose. Extruded aluminium body and powder coated in epoxy polyester. Standard version with LED 4000K, CRI>80 and 75.000h lifetime (@L90, B10, Ta 25 C). Possibility to choose different beam angles (14 /47 /oval) alongside opal diffuser that gives a smooth light aura and high visual comfort. Cable supply available in 3 different colours: brown, orange or black. Optional transparent clip to customised configurations and 2700K colour temperatures. Available in 16 different colours. - as Roxo Lighting GLAM S8.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.