



**LED**

Norms: EN 60598-1, EN 60598-2-1



**PRODUCT DESCRIPTION**

**Areas of Application:** Public buildings, Housing, Offices, Hotel and Restaurant services, Art and Culture spaces.

**Light Distribution:** Direct.

**Light Source:** LED 4000K, CRI>80, 75.000h life (@L90, B10, Ta 25 C).

**Optical System:** Lens in PMMA and Polycarbonate Diffuser.

**Control Gear:** Not included.


**Materials:** Body: Extruded aluminium tube.

**Surface Finish:** Powder coated.

/S - Suspended version

	LED	UGR	W	Lm	mA	V	Lm/W	η(%)	AxB(mm)	kg	ORDER CODE
		≤16	2	240	700	3	114	95	Ø30x150	0,36	90063.L150.E
		≤16	2	240	700	3	114	95	Ø30x300	0,50	90063.L300.E
		≤16	2	240	700	3	114	95	Ø30x450	0,63	90063.L450.E
		≤16	2	240	700	3	114	95	Ø30x600	0,78	90063.L600.E

Spot - Spotlight version

	LED	UGR	W	Lm	mA	V	Lm/W	η(%)	AxB(mm)	kg	ORDER CODE
		≤16	2	240	700	3	114	95	Ø30x80	0,28	90064.L080.E
		≤16	2	240	700	3	114	95	Ø30x150	0,43	90064.L150.E
		≤16	2	240	700	3	114	95	Ø30x300	0,71	90064.L300.E

/E - Recessed version

	LED	UGR	W	Lm	mA	V	Lm/W	η(%)	A(mm)	kg	ORDER CODE
		≤16	2	240	700	3	114	95	Ø59	0,10	90065.L000.E

- To complete the product add optical system. Please order separately.
- The technical data represent rated values for an 47° optic lens.

Example code for order: 90063.L150.E (ORDER CODE) + W(COLOUR/FINISH) + 926200 + 2000 + 941700 (OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

**COLOUR / FINISH**

Code	Description
W	White
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red
0	Sahara
L	Autumn
D	Golden eye
R	Rusty chain
C	Pure chocolate
N	Jungle
1	Mist
9	Dark rock
I	Carbon

**OPTIONS**

**Optical system**



14 Lens  
47 Lens  
Oval Lens

Order Code  
**926200**  
**926201**  
**926202**


**Colour temperature**



2700K

Order Code  
**2000**

**Current cable**



Orange fabric cable 1,5 m  
Black fabric cable 1,5 m  
Brown fabric cable 1,5 m

Order Code  
**941700**  
**941800**  
**941900**

**Ceiling roses**



Please check the datasheet GLAM - Ceiling Roses

**DETAILS**




14 optical lens light effect



47 optical lens light effect



Light effect with oval lens




Lens fixing system detail



Fixing system and fast connection detail


We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

**PHOTOMETRY**

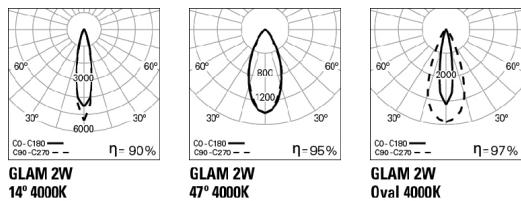


**DIMENSIONS**

**/S - Suspended version**

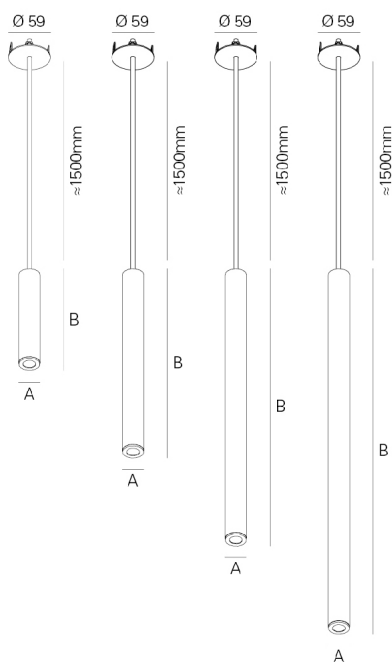

**Spot - Spotlight version**

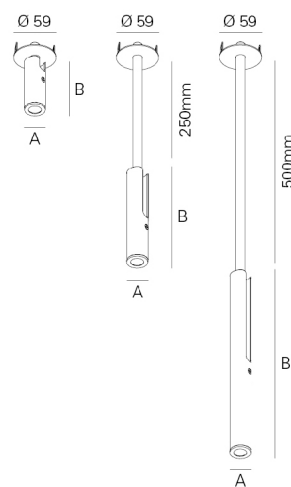

**/E - Recessed version**



**TO SPECIFY:**

Modular LED luminaire that allows different kinds of application (3 types) that can be combined together: /S - Suspended version, Spot - Spotlight version or /E - Recessed version. Extruded aluminium body and powder coated in epoxy polyester. Standard version with LED 4000K, CRI>80 and 75.000h lifetime (@L90, B10, Ta 25 C). Possibility to choose different beam angles(14 /47 /oval) alongside opal diffuser that gives a smooth light aura and high visual comfort. Cable supply available in 3 different colours: brown, orange or black and optional 2700K colour temperatures. GLAM application - Ceiling roses. Available in 16 different colours. - as Roxo Lighting GLAM.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.