

M-LINE CONTINUOUS SYSTEM



Construction

M-Line's sleek aluminium profile can be adapted to form many bespoke linear lengths. Corner sections are fully lit to enhance the visual impact that continuous lighting creates. Suspended and wall-mounted systems can be supplied to incorporate direct/indirect lighting options with dual switching available.

The system can also be surface mounted or recessed in both ceilings and walls.

Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Hotels and Leisure Facilities, Residential Properties, Retail, Bars and Restaurants.

- // Aluminium extruded sections in 9 standard lengths and can be increased by 140mm increments
- // Bespoke shaped formations subject to design
- // Colour options in 3000/4000/5000K
- // Incorporates European branded LED drivers
- // Direct/Indirect lighting options available for suspended and wall mounted
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Clip-in gear tray for easy installation
- // Opal polycarbonate diffuser
- // Tuneable white and RGB options available
- // Dimmable and emergency options available
- // Compatible with eBlue wireless switching system
- // Dual Switch option available

Mounting Options

SURFACE




SUSPENDED



RECESSED



WALL - SURFACE
OR RECESSED



M-LINE CONTINUOUS SYSTEM



Presence Detector

Presence detectors are typically flush mounted in a 50mm wide aluminium plate.



Light Spill Plate

The innovative light spill plate has been designed to clip in where sections join to hide any unsightly light bleed.



Joining System

Dual joining plates are mounted within the profile, that slide into grooves in either section to ensure a rigid fit.




Suspension Set

Snap on suspension clip allows easy location at any point along back of luminaire. Alternative lengths available.



Quick Release Clamps

The quick-release clamp provides a tool-free secure installation method.

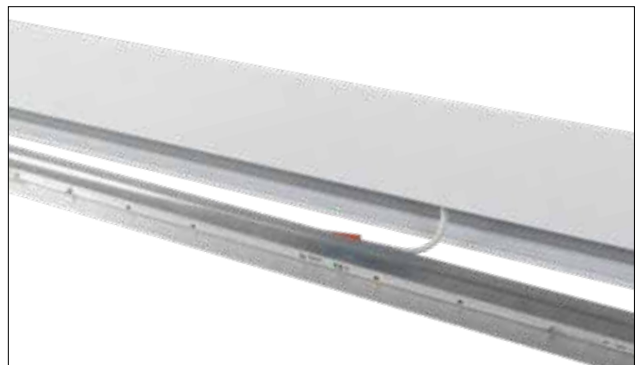

Clip-in Gear Tray

Gear tray is secured using pre-installed clips, which allows for a tool-free installation.


M-LINE CONTINUOUS SYSTEM



Suspended Direct/Indirect Systems



Surface Mounted Systems

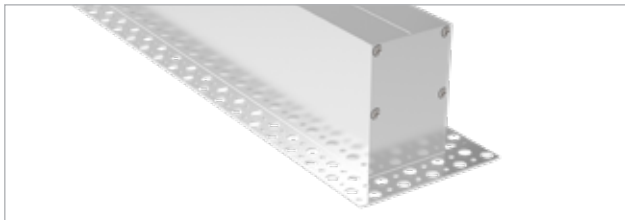

Recessed Trimless System



Recessed System

Control Options

Product Code Suffix	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1 - 10v Ballast
/DALI	DALI/DSI Dimmable Ballast
/3K	3000K LED
/5K	5000K LED
RGB	Colour Changing LED

Suspension Options

Product Code Suffix	Description
Supply Cable	
CABTR3C	1.5m transparent current cable 3 x 0.75mm ²
CABTR5C	1.5m transparent current cable 5 x 0.75mm ²
MLESUS	2m Suspension Kit for Suspended M-Line
NOTE: Alternative length suspension kits available - POA	

Colour Options

Product Code Suffix	Description
W	White (RAL 9016)
G	Grey (RAL 9006)
B	Black (RAL 9005)
U (POA)	Blue (RAL 5002)
V (POA)	Green (RAL 6018)
T (POA)	Yellow (RAL 1021)
K (POA)	Red (RAL 3020)
N (POA)	Jungle
D (POA)	Goldeneye
O (POA)	Sahara
L (POA)	Autumn
R (POA)	Rusty chain
C (POA)	Pure chocolate
1 (POA)	Mist
9 (POA)	Darkrock
1 (POA)	Carbon

Typical Section Build Up Options

