

## ECO-LINE

### LED Batten

- // Opal polycarbonate diffuser
- // IP20 for indoor use only
- // LED CRI>80, 40,000h life
- // Removable gear tray for easy installation
- // BESA box entry points
- // 20mm conduit entry in end caps
- // Presence detection options
- // IK06 rating
- // 4000K as standard
- // 5-year warranty





### Construction

The Eco-Line is designed to be surface mounted and, with its simple design and construction, gives superior capability. This highly efficient luminaire is not only energy saving, it is easy to fit by simply unclipping the diffuser and gear tray. The main channel of batten allows easy cable entry via the BESA entries. The polycarbonate diffuser achieves anti-glare but high light transmittance. As standard, the luminaire utilises recognised branded LED boards and drivers.

### Typical Applications

Hospitals, Warehouses, Factories, Retail and Supermarkets etc.

### Size Options

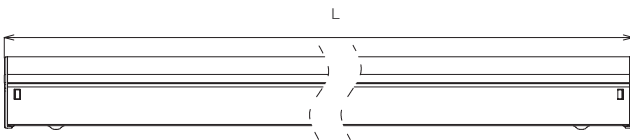

Size A	Size B	Size C
L 625mm	L 1225mm	L 1525mm
W 58.5mm	W 58.5mm	W 58.5mm
H 58.5mm	H 58.5mm	H 58.5mm

Product Code	LED Wattage	Lumen Output	Lumen / Watt	Colour Temperature	Size
CLE12/20	20W	2099	104	4000K	A
CLE14/40	38W	4119	107	4000K	B
CLE15/45	44W	4937	112	4000K	C

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/P	Presence Detection
/PCF	Dimmable Presence Detection

For optional features, please include the option code suffix with the product code when ordering.