


FLOE-LINE

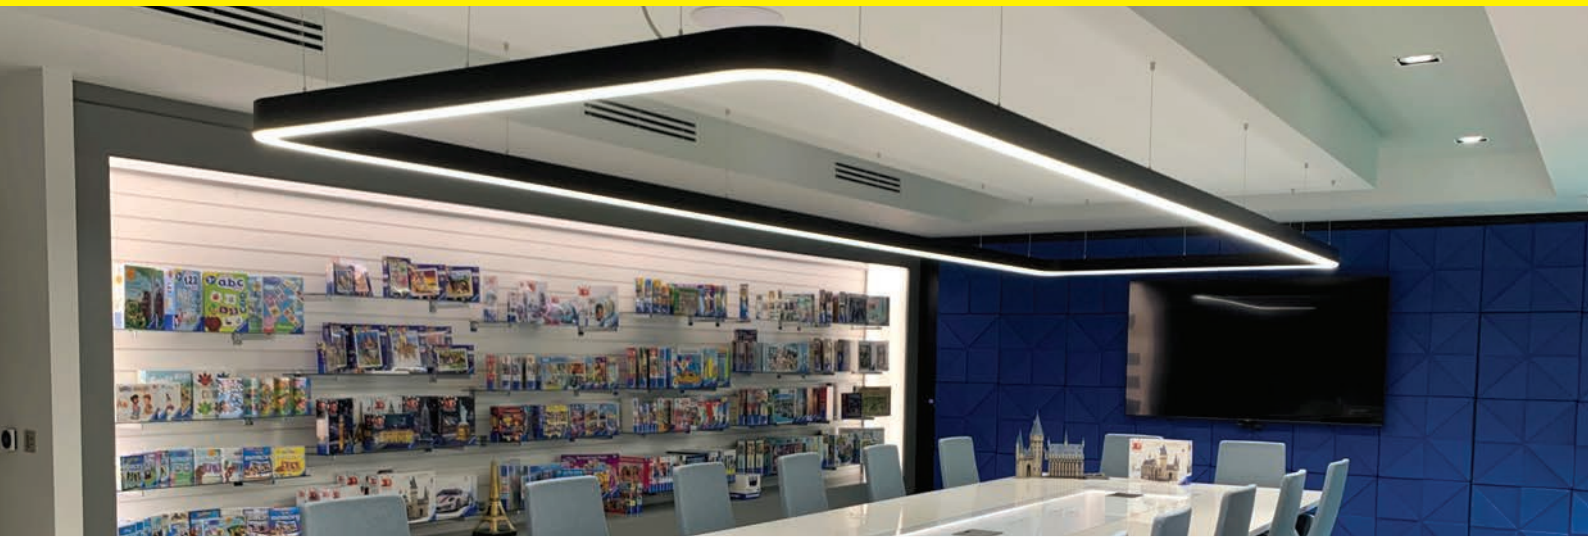

Construction



The 90° curve of the Floe-Line has been designed to break the conventions of linear lighting and take lighting design to another dimension. It has flexible connections which can be fully integrated with multiple linear lengths. With so many options, let your imagination defy limitations and enhance interiors like never before.

Typical Applications

General Office Areas, Large Receptions, Boardrooms, Atriums, Function Halls, Education Facilities, Hotels and Leisure Facilities, Hospitality Venues, Retail and Residential Properties.

- // Your design specification
- // Your choice of RAL colour
- // Up to 120 lumens per circuit watt
- // Opal diffuser as standard, microprism option available
- // Direct or direct/indirect in 90:10 ratio available
- // 3000K and 4000K options available
- // Emergency and DALI options
- // Compatible with Casambi wireless system
- // Colour-matched ceiling rose
- // Suspended or surface mounted options
- // 2m suspension cables as standard
- // 5-year warranty

Size Options

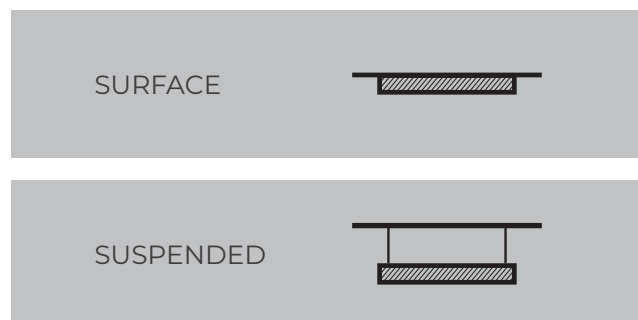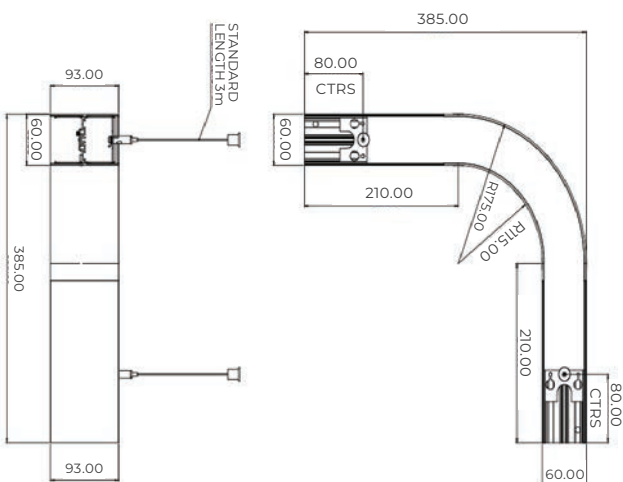

FLOE-LINE



Floe-Line					
Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Size
FLE/RTC/2129/1000	86W	8563	99	4000K	2129 x 1000mm
FLE/RTC/2411/1000	94W	9378	99	4000K	2411 x 1000mm
FLE/RTC/2694/1000	103W	10194	99	4000K	2694 x 1000mm
FLE/RTC/3258/1000	119W	11825	99	4000K	3258 x 1000mm
FLE/RTC/3258/1565	135W	13456	99	4000K	3258 x 1565mm
FLE/RTC/4105/1565	164W	16310	99	4000K	4105 x 1565mm

Control Options

Option Code	Description
/M	3 Hour Maintained Emergency (Downlight Only)
/MZ	3 Hour Maintained DALI Emergency (Downlight Only)
/DALI	DALI/DSI Dimmable (Downlight Only)
/BTC	Casambi Dimmable
/3K	3000K LED
/MP	Microprism Diffuser
/DIR	Direct Lighting Only
/DIR/IND	Direct and Indirect Lighting

Colour Options

Option Code	Description
/W	White (RAL 9003)
/G	Grey (RAL 9007)
/B	Black (RAL 9005)
/BRZ	Bronze
/GLD	Gold

N.B Other RAL colours available upon request

Suspension Options

Option Code	Description
Supply Cable	
CABTR3C	1.5m Transparent Current Cable 3 x0.75mm ²
CABTR5C	1.5m Transparent Current Cable 5 x0.75mm ²
CR375W/2M	3 Core 0.75mm White Flex Cable - 2m Lead
CR375B/2M	3 Core 0.75mm Black Flex Cable - 2m Lead
CR475W/2M	4 Core 0.75mm White Flex Cable - 2m Lead
CR475B/2M	4 Core 0.75mm Black Flex Cable - 2m Lead
CR575W/2M	5 Core 0.75mm White Flex Cable - 2m Lead
CR575B/2M	5 Core 0.75mm Black Flex Cable - 2m Lead
FSUS	2m Suspension kit for suspended Floe-Line

NOTE: Alternative length suspension kits available - POA

Sizes shown are standard sizes. For custom size, please enquire and our team will be happy to help.

For optional features, please include the option code suffix with the product code when ordering.