mount
LIGHTING THE WAY

FLOE-LINE

90° Curves with Bespoke Linear Lengths and Angles

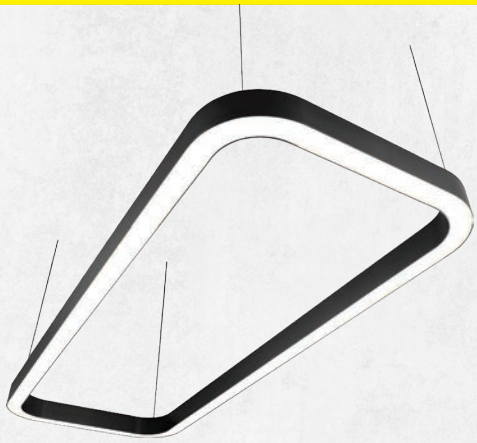

- Your design specification
- Your choice of RAL colour
- Opal diffuser as standard, microprism and diffused microprism available
- Direct and indirect options available
- 3000K and 4000K options available
- Emergency and DALI options
- Suspended or surface mounted options
- 3m suspension cables as standard

Construction

The 90° curve of the Floe-Line has been designed to break the conventions of linear lighting and take lighting design to another dimension. It has flexible connections to be fully integrated with any linear length and size angle. With so many options, let your imagination defy limitations and enhance interiors like never before.

Typical Applications

General Office Areas, Large Receptions, Corridors, Atriums, Function Halls, Education Facilities, Hotel and Leisure Facilities, Hospitality Venues, Retail and Residential Properties.

Size Options

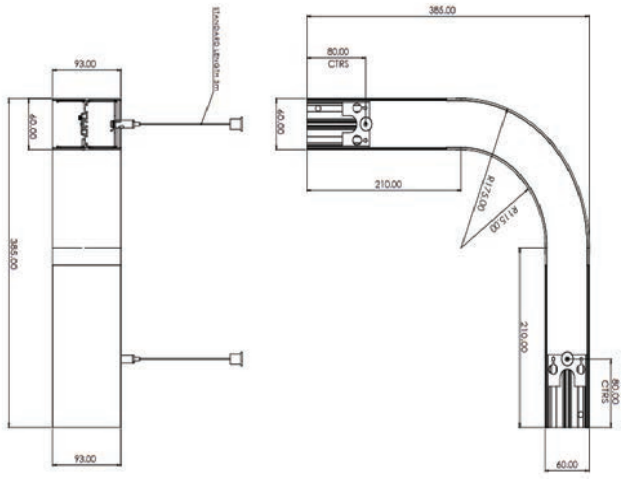

Option Code	
/M	3 Hour Maintained Emergency (Downlight Only)
/MZ	3 Hour Maintained DALI Emergency (Downlight Only)
/DALI	DALI/DSI Dimmable (Downlight Only)
/3K	3000K LED
/MP	Microprism
/DP	Diffused Microprism
/DIR	Direct Lighting Only
/DIR/IND	Direct and Indirect Lighting

Colour Options

Option Code		Description
/W		White (RAL 9016)
/G		Grey (RAL 9006)
/B		Black (RAL 9005)
/U (POA)		Blue (RAL 5002)
/V (POA)		Green (RAL 6018)
/T (POA)		Yellow (RAL 1021)
/K (POA)		Red (RAL 3020)
N.B Other RAL colours available upon request		

For optional features, please include the option code suffix with the product code when ordering.