

## M-LINE 54 - LOW GLARE UGR19





### Construction

Low glare, UGR19 compliant luminaire is supplied as a suspended fitting as standard, but the profile can be utilised for surface mounting. This is achieved by directly fixing through the rear of the profile. Suspension is made simple using a single-point ceiling bracket with a 2m adjustable stainless steel wire system. The linear aluminium profile is available in standard lengths up to 4523mm with bespoke lengths and shapes available to order upon request. The Low UGR is achieved with a specialised polycarbonate diffuser.

### Typical Applications

General Office Areas, Conference Rooms, Educational Facilities, Retail Units, Healthcare Facilities, Hospitality and Leisure Facilities.

- // Aluminium extruded sections in 15 standard lengths
- // Bespoke lengths available in multiple increments of 560mm and 280mm
- // Colour options in 3000K/4000K
- // Custom shapes available subject to design
- // Incorporates European-branded LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Dimmable and emergency options are available
- // Compatible with Casambi wireless control system
- // Uniform light and controlled beam with specialised diffuser
- // Low UGR
- // Energy efficient with over 150 lm/W
- // Lifetime >80,000 h L80 B10
- // CRI>80
- // 5-year warranty

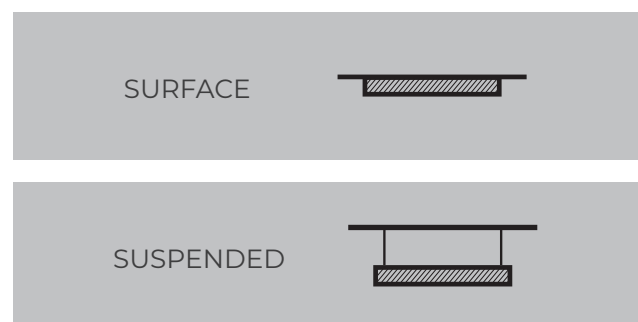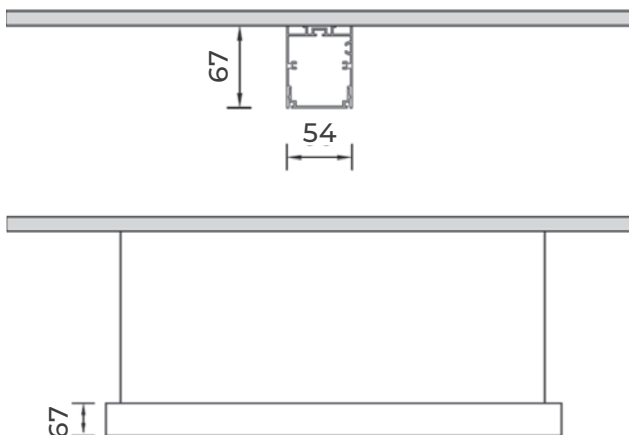

## M-LINE 54 - LOW GLARE UGR19



M-Line 54 - Low Glare UGR19					
Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Size
MLE54/596/LG	10W	1548	155	4000K	596mm
MLE54/876/LG	15W	2322	155	4000K	876mm
MLE54/1157/LG	20W	3096	155	4000K	1157mm
MLE54/1437/LG	25W	3870	155	4000K	1437mm
MLE54/1718/LG	30W	4644	155	4000K	1718mm
MLE54/1998/LG	35W	5418	155	4000K	1998mm
MLE54/2279/LG	40W	6192	155	4000K	2279mm
MLE54/2559/LG	45W	6966	155	4000K	2559mm
MLE54/2840/LG	50W	7740	155	4000K	2840mm
MLE54/3120/LG	55W	8514	155	4000K	3120mm
MLE54/3411/LG	60W	9288	155	4000K	3411mm
MLE54/3681/LG	65W	10062	155	4000K	3681mm
MLE54/3962/LG	70W	10836	155	4000K	3962mm
MLE54/4242/LG	75W	11610	155	4000K	4242mm
MLE54/4523/LG	80W	12384	155	4000K	4523mm

**NOTE:** Bespoke lengths available upon request in multiple increments of 560mm and 280mm

### Control Options

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Driver
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/3K	3000K LED

### Colour Options

Option Code	Description
/W	White (RAL 9016)
/G	Grey (RAL 9006)
/B	Black (RAL 9005)

### Mounting Options

Option Code	Description
/SUR	Surface Mounted

**NOTE:** Alternative length suspension kits available - POA

For optional features, please include the option code suffix with the product code when ordering.