

LED STRIP TAPES

Mount Lighting 24V LED strip, mandatory dissipation with aluminium profiles required. Flexible PCB and double-sided back adhesive, flexible silicon coating for IP65 version. Power supply cable length 150mm included. Electronic or dimmable driver 24V is to be ordered separately.

Strip LED 19.2 W/m

- // 238 LED/m
- // Cuttable every 29.4mm (7LED)
- // Strip LED suitable to achieve luminaire uniformity when installed with visible diffusers

Product Code	Colour Temperature	Wattage/m	LM/m	L (mm)	IP	CRI
LFX19.2/27K/20/90	2700K	19.2 W/m	1952	5000	20	90
LFX19.2/3K/20/90	3000K	19.2 W/m	2140	5000	20	90
LFX19.2/4K/20/90	4000K	19.2 W/m	2176	5000	20	90
LFX19.2/3K/65/80	3000K	19.2 W/m	2050	5000	65	80
LFX19.2/4K/65/80	4000K	19.2 W/m	2244	5000	65	80

Strip LED 22 W/m

- // 238 LED/m
- // Cuttable every 29.4mm (7LED)
- // Strip LED suitable to achieve luminaire uniformity when installed with visible diffusers

Product Code	Colour Temperature	Wattage/m	LM/m	L (mm)	IP	CRI
LFX22/3K/20/80	3000K	22 W/m	2786	5000	20	80
LFX22/4K/20/80	4000K	22 W/m	2804	5000	20	80
LFX22/3K/65/80	3000K	22 W/m	2464	5000	65	80
LFX22/4K/65/80	4000K	22 W/m	2594	5000	65	80

Strip LED 8.8 W/m





- // 240 LED/m
- // Cuttable every 25mm (6LED)
- // Strip LED suitable to achieve luminaire uniformity when installed with visible diffusers

Product Code	Colour Temperature	Wattage/m	LM/m	L (mm)	IP	CRI
LFX8.8/27K/20/90	2700K	8.8 W/m	902	5000	20	90
LFX8.8/3K/20/90	3000K	8.8 W/m	844	5000	20	90
LFX8.8/4K/20/90	4000K	8.8 W/m	900	5000	20	90

Strip LED 14.4 W/m

- // 140 LED/m
- // Cuttable every 50mm (7LED)

Product Code	Colour Temperature	Wattage/m	LM/m	L (mm)	IP	CRI
LFX14.4/3K/20/80	3000K	14.4 W/m	1892	5000	20	80
LFX14.4/4K/20/80	4000K	14.4 W/m	1880	5000	20	80
LFX14.4/3K/65/80	3000K	14.4 W/m	1578	5000	65	80
LFX14.4/4K/65/80	4000K	14.4 W/m	1716	5000	65	82



LED STRIP TAPES

Strip LED 4mm Width 11.5 W/m

// 182 LED/m
// Cuttable every 38.4mm (7LED)

Product Code	Colour Temperature	Wattage/m	LM/m	L (mm)	IP	CRI
LFX11.5/27K/20/90	2700K	11.5 W/m	1100	5000	20	90
LFX11.5/3K/20/90	3000K	11.5 W/m	1014	5000	20	90
LFX11.5/4K/20/90	4000K	11.5 W/m	1154	5000	20	90

Strip LED 24mm Double Width 25 W/m

// 336 LED/m
// Cuttable every 41.6mm (14LED)

Product Code	Colour Temperature	Wattage/m	LM/m	L (mm)	IP	CRI
LFX25/27K/20/90	2700K	25 W/m	2926	5000	20	90
LFX25/3K/20/90	3000K	25 W/m	2670	5000	20	90
LFX25/4K/20/90	4000K	25 W/m	3000	5000	20	90

Strip LED 24mm Tunable White 19.2 W/m





// 240 LED/m
// Cuttable every 50mm (12LED)

Product Code	Colour Temperature	Wattage/m	LM/m	L (mm)	IP	CRI
LFX19.2/TW3K/57K/20/90	TW 3000K-5700K	19.2 W/m	1906	5000	20	90

Strip LED 24mm RGBW 24 W/m

// 84 LED/m
// 70 LED/m
// Cuttable every 71.4mm (6LED)

Product Code	Colour Temperature	Wattage/m	LM/m	L (mm)	IP	CRI
LFX24/RGBW/4K/20	RGBW 4000K	24 W/m	1175	5000	20	80
LFX24/RGBW/27K/20	RGBW 2700K	24 W/m	1080	5000	20	80
LFX24/RGBW/4K/65	RGBW 4000K	24 W/m	1008	5000	65	80
LFX24/RGBW/27K/65	RGBW 2700K	24 W/m	985	5000	65	80

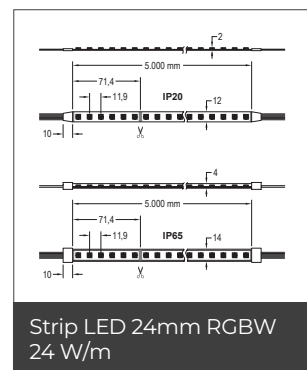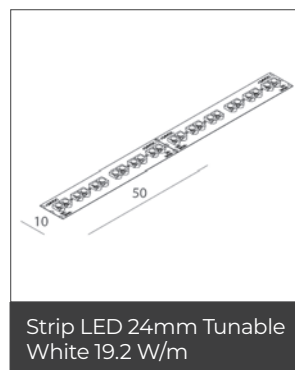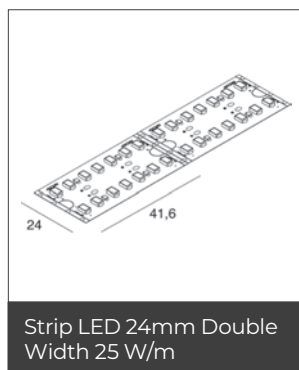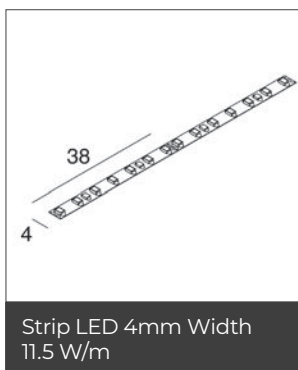

Aluminium profiles and drivers are not included and can be ordered separately.