


M-LINE 48 - UGR19 DIRECT/INDIRECT

- // Aluminium extruded sections in 15 standard lengths
- // Bespoke lengths available in multiple increments of 560mm and 280mm
- // Colour options in 3000K/4000K
- // Incorporates European-branded LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Dimmable and emergency options are available
- // Compatible with Casambi wireless switching system
- // Uniform light and controlled beam with specialised diffuser
- // CRI>80
- // 5-year warranty

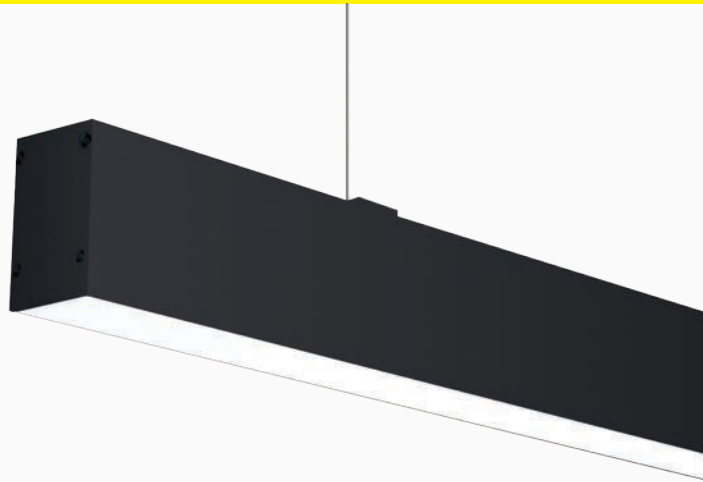


Construction

Low glare, UGR19 compliant luminaire is supplied as a suspended fitting with direct and indirect light distribution. Suspension is made simple using a single-point ceiling bracket with a 2m adjustable stainless steel wire system. The linear aluminium profile is available in standard lengths up to 4551mm, with bespoke lengths available to order upon request. The low UGR is achieved with a specialised microprismatic diffuser manufactured from extruded PMMA.

Typical Applications

General Office Areas, Conference Rooms, Educational Facilities, Reception Areas, Retail Units, Healthcare Facilities, Hospitality and Leisure Facilities.

Size Options

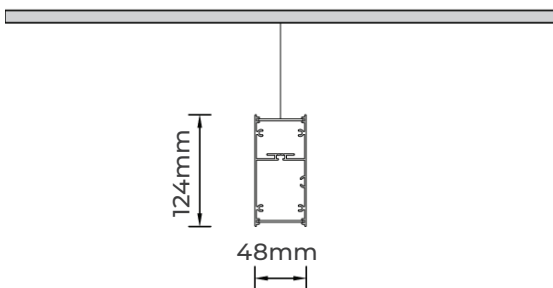

Size

H 124mm

W 48mm

For optional features, please include the option code suffix with the product code when ordering.

Product Code	LED Wattage	Lumen Output	Lumen /Watt	Colour Temp.	Size
MLE48/596/LG	23W	2492	110	4000K	596mm
MLE48/881/LG	34W	3738	110	4000K	881mm
MLE48/1161/LG	45W	4984	110	4000K	1161mm
MLE48/1446/LG	57W	6230	110	4000K	1446mm
MLE48/1726/LG	68W	7476	110	4000K	1726mm
MLE48/2011/LG	79W	8722	110	4000K	2011mm
MLE48/2291/LG	91W	9968	110	4000K	2291mm
MLE48/2576/LG	102W	11214	110	4000K	2576mm
MLE48/2856/LG	113W	12460	110	4000K	2856mm
MLE48/3141/LG	125W	13706	110	4000K	3141mm
MLE48/3421/LG	136W	14952	110	4000K	3421mm
MLE48/3706/LG	147W	16198	110	4000K	3706mm
MLE48/3986/LG	159W	17444	110	4000K	3986mm
MLE48/4271/LG	170W	18690	110	4000K	4271mm
MLE48/4551/LG	181W	19936	110	4000K	4551mm

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10 V Dimmable Driver
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/WHT	White Option
/BLK	Black Option
/GRY	Grey Option
/3K	3000K LED

Option Code	Description
/W	White (RAL 9016)
/G	Grey (RAL 9006)
/B	Black (RAL 9005)