

M-LINE 54 - UGR19 RECESSED

- // Aluminium extruded sections in 15 standard lengths
- // Bespoke lengths available in multiple increments of 560mm and 280mm
- // Colour options in 3000K/4000K
- // Incorporates European-branded LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Dimmable and emergency options are available
- // Compatible with Casambi wireless switching system
- // Uniform light and controlled beam with specialised diffuser
- // CRI>80
- // 5-year warranty




Construction

Low glare, UGR19 compliant luminaire is supplied as a recessed fitting with direct and even light distribution. Recessing the LED linear profile requires an extra 10mm cut out for each standard length. The recessed linear aluminium profile is available in standard lengths up to 4517mm, with bespoke lengths available to order upon request. The low UGR is achieved with a specialised microprismatic diffuser manufactured from extruded PMMA.

Typical Applications

General Office Areas, Conference Rooms, Educational, Facilities, Reception Areas, Retail Units, Healthcare Facilities, Hospitality and Leisure Facilities.

Dimensions

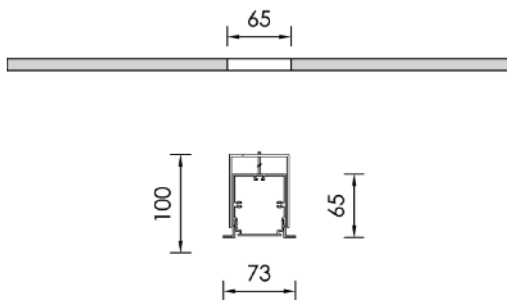

For optional features, please include the option code suffix with the product code when ordering.

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temp.	Size
MLER54/590/LG	10W	1548	155	4000K	590mm
MLER54/870/LG	15W	2322	155	4000K	870mm
MLER54/1151/LG	20W	3096	155	4000K	1151mm
MLER54/1431/LG	25W	3870	155	4000K	1431mm
MLER54/1712/LG	30W	4644	155	4000K	1712mm
MLER54/1992/LG	35W	5418	155	4000K	1992mm
MLER54/2273/LG	40W	6192	155	4000K	2273mm
MLER54/2553/LG	45W	6966	155	4000K	2553mm
MLER54/2834/LG	50W	7740	155	4000K	2834mm
MLER54/3114/LG	55W	8514	155	4000K	3114mm
MLER54/3395/LG	60W	9288	155	4000K	3395mm
MLER54/3675/LG	65W	10062	155	4000K	3675mm
MLER54/3956/LG	70W	10836	155	4000K	3956mm
MLER54/4236/LG	75W	11610	155	4000K	4236mm
MLER54/4517/LG	80W	12384	155	4000K	4517mm

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Dimmable Driver
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/WHT	White Option
/BLK	Black Option
/3K	3000K LED

Option Code	Description
/W	White (RAL 9016)
/G	Grey (RAL 9006)
/B	Black (RAL 9005)