

M-LINE XL RECESSED





Construction

The recessed system is available in standard lengths up to 2840mm with bespoke formations and continuous lengths available to order. The standard system is designed for ceiling mounting, however, wall mounting systems can be supplied on request. Installation is simple using the easy-fix bracket system.

Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities, and Residential Properties.

- // Aluminium extruded sections in 9 standard lengths
- // Bespoke lengths available to order in 140mm increments
- // Colour options in 3000K/4000K/5000K
- // Custom-shaped formations subject to design
- // Incorporates European branded LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Up to 104 lumens per circuit watt
- // Clip-in gear tray for easy installation
- // Opal polycarbonate diffuser
- // Tuneable white and RGB options available
- // Dimmable and emergency options available
- // Compatible with Casambi wireless control system
- // 5-year warranty

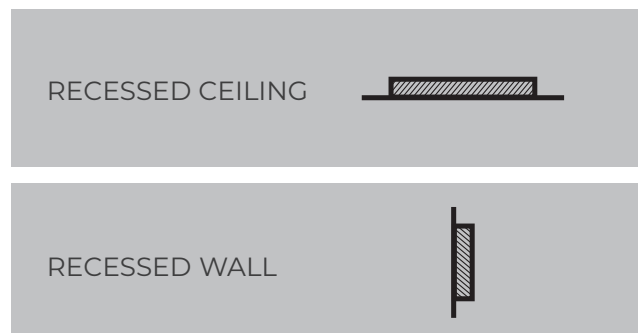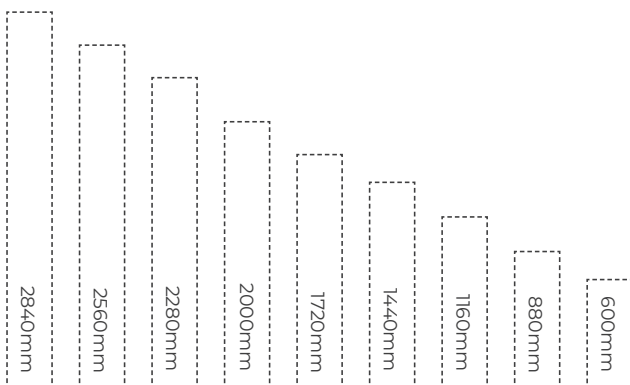

M-LINE XL RECESSED



Typical Recessed Installation



Recessed System

Recessed System

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Size	Cutout Dimensions
MLER75/600	17W	1589	104	4000K	600mm	584mm x 77mm
MLER75/880	27W	2383	104	4000K	880mm	864mm x 77mm
MLER75/1160	35W	3178	104	4000K	1160mm	1144mm x 77mm
MLER75/1440	43W	3972	104	4000K	1440mm	1424mm x 77mm
MLER75/1720	52W	4767	104	4000K	1720mm	1704mm x 77mm
MLER75/2000	60W	5562	104	4000K	2000mm	1984mm x 77mm
MLER75/2280	84W	6356	104	4000K	2280mm	2264mm x 77mm
MLER75/2560	78W	7150	104	4000K	2560mm	2544mm x 77mm
MLER75/2840	87W	7945	104	4000K	2840mm	2824mm x 77mm



NOTE: Longer bespoke lengths available in 140mm increments.

Control Options

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Driver
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/3K	3000K LED
/5K	5000K LED
/RGB	Colour Changing LED
/TW	Tunable White LED

Colour Options

Option Code	Description
/W	White (RAL 9016)
/G	Grey (RAL 9006)
/B	Black (RAL 9005)
/U (POA)	Blue (RAL 5002)
/V (POA)	Green (RAL 6018)
/T (POA)	Yellow (RAL 1021)
/K (POA)	Red (RAL 3020)
/N (POA)	Jungle
/D (POA)	Goldeneye
/O (POA)	Sahara
/L (POA)	Autumn
/R (POA)	Rusty chain
/C (POA)	Pure chocolate
/I (POA)	Mist
/9 (POA)	Darkrock
/I (POA)	Carbon

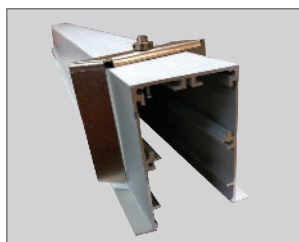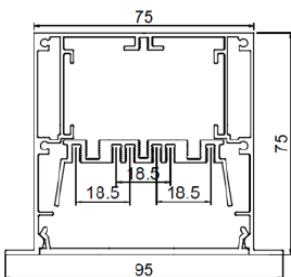

Fitted Recessed Bracket

For optional features, please include the option code suffix with the product code when ordering.