

## M-LINE XL SURFACE AND SUSPENDED





### Construction

The suspended and surface system utilises the same profile and is available in standard lengths up to 2824mm with bespoke lengths available to order. Surface mounting is achieved by directly fixing through the rear of the profile. Suspension is made simple using a single point ceiling bracket with 2m adjustable stainless steel wire system. Uplighting is available on lengths from 584mm upwards.


### Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities and Residential Properties.

- // Aluminium extruded sections in 9 standard lengths
- // Bespoke lengths available in 140mm increments
- // Colour options in 3000K/4000K/5000K
- // Custom shapes available subject to design
- // Incorporates European branded LED drivers
- // Up to 104 lumens per circuit watt
- // Direct/Indirect lighting options available for suspended fittings
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Clip-in gear tray for easy installation
- // Opal polycarbonate diffuser
- // Tuneable white and RGB options available
- // Dimmable and emergency options available
- // Compatible with Casambi wireless control system
- // Dual Switch option available

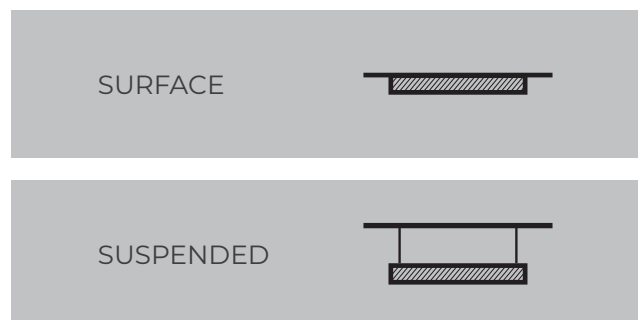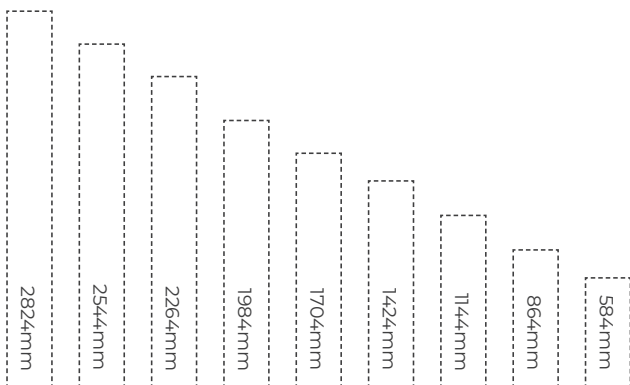

## M-LINE XL SURFACE AND SUSPENDED

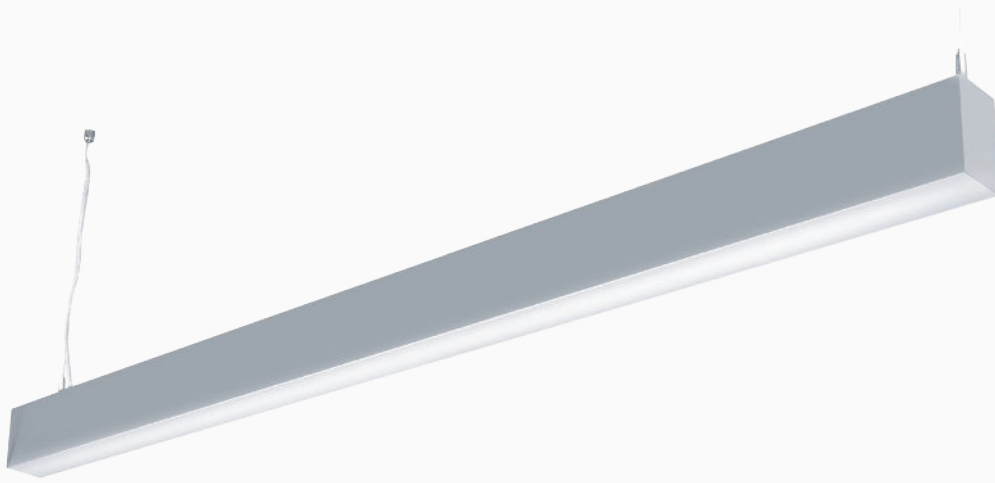

Suspended Direct Lighting System					
Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Size
MLE75/584	17W	1589	104	4000K	584mm x 75mm
MLE75/864	26W	2383	104	4000K	864mm x 75mm
MLE75/1144	35W	3178	104	4000K	1144mm x 75mm
MLE75/1424	43W	3972	104	4000K	1424mm x 75mm
MLE75/1704	52W	4767	104	4000K	1704mm x 75mm
MLE75/1984	60W	5562	104	4000K	1984mm x 75mm
MLE75/2264	70W	6356	104	4000K	2264mm x 75mm
MLE75/2544	78W	7150	104	4000K	2544mm x 75mm
MLE75/2824	87W	7945	104	4000K	2824mm x 75mm

**NOTE:** Includes 2m suspension kits (longer bespoke lengths available in 140mm increments)

Suspended Direct/Indirect Lighting System/70% Direct/30% Indirect					
Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Size
MLE75/584/DIR/IND	27W	2057	104	4000K	584mm x 75mm
MLE75/864/DIR/IND	43W	3317	104	4000K	864mm x 75mm
MLE75/1144/DIR/IND	60W	4579	104	4000K	1144mm x 75mm
MLE75/1424/DIR/IND	78W	5841	104	4000K	1424mm x 75mm
MLE75/1704/DIR/IND	95W	7102	104	4000K	1704mm x 75mm
MLE75/1984/DIR/IND	113W	8364	104	4000K	1984mm x 75mm
MLE75/2264/DIR/IND	130W	9625	104	4000K	2264mm x 75mm
MLE75/2544/DIR/IND	147W	10885	104	4000K	2544mm x 75mm
MLE75/2824/DIR/IND	165W	12148	104	4000K	2824mm x 75mm

**NOTE:** Includes 2m suspension kits (longer bespoke lengths available in 140mm increments)

Surface Mounted System					
Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Size
MLES75/584	17W	1589	104	4000K	584mm x 75mm
MLES75/864	26W	2383	104	4000K	864mm x 75mm
MLES75/1144	35W	3178	104	4000K	1144mm x 75mm
MLES75/1424	43W	3972	104	4000K	1424mm x 75mm
MLES75/1704	52W	4767	104	4000K	1704mm x 75mm
MLES75/1984	60W	5562	104	4000K	1984mm x 75mm
MLES75/2264	70W	6356	104	4000K	2264mm x 75mm
MLES75/2544	78W	7150	104	4000K	2544mm x 75mm
MLES75/2824	87W	7945	104	4000K	2824mm x 75mm

## M-LINE XL SURFACE AND SUSPENDED



Suspended Direct/Indirect System



Surface Mounted System

### Control Options

Option Code	Description
/M	3 Hour Maintained Emergency
/MZ	3 Hour Maintained DALI Emergency
/D	1-10V Driver
/DALI	DALI/DSI Dimmable Driver
/BTC	Casambi Dimmable
/3K	3000K LED
/5K	5000K LED
/RGB	Colour Changing LED
/TW	Tunable White LED



### Colour Options

Option Code	Description
/W	White (RAL 9016)
/G	Grey (RAL 9006)
/B	Black (RAL 9005)
/U (POA)	Blue (RAL 5002)
/V (POA)	Green (RAL 6018)
/T (POA)	Yellow (RAL 1021)
/K (POA)	Red (RAL 3020)
/N (POA)	Jungle
/D (POA)	Goldeneye
/O (POA)	Sahara
/L (POA)	Autumn
/R (POA)	Rusty chain
/C (POA)	Pure chocolate
/I (POA)	Mist
/9 (POA)	Darkrock
/I (POA)	Carbon

### Suspension Options

Option Code	Description
<b>Supply Cable</b>	
CABTR3C	1.5m Transparent Current Cable 3 x0.75mm <sup>2</sup>
CABTR5C	1.5m Transparent Current Cable 5 x0.75mm <sup>2</sup>
MLESUS	2m Suspension kit for suspended M-Line

**NOTE:** Alternative length suspension kits available - POA

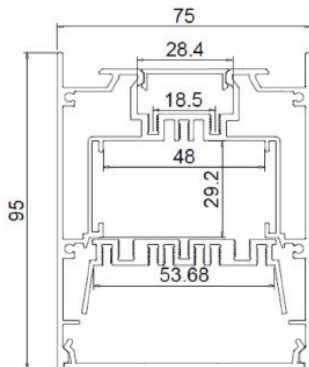

For optional features, please include the option code suffix with the product code when ordering.