

## MULTI-TRACK LV SYSTEM - 48V TRACK SPOTS

### 48v Low Voltage LED Track Spot

- // Built-in electronic driver, DALI / phase-dim / Casambi options
- // Clear safety glass diffuser, sandblasted / honeycomb option
- // Extruded aluminium housing
- // Rotation: vertical 90°/horizontal 360°
- // 4000K as standard (3000K available)
- // Black colour as standard (white available)
- // CRI>80 as standard (CRI>90 available)



### Construction


The 48v LED track spots come in three sizes and are specially designed to discreetly conceal the control gear for use with our Stucchi-compatible Multi-Track LV system.

The extruded aluminium housing is available in black as standard or white option. With two colour temperatures and two CRI options to choose from, you can guarantee the perfect light for the right scene.

### Typical Applications

General Office Areas, Conference Rooms, Galleries, Libraries, Museums, Display Areas and Retail Units.

### Size Options

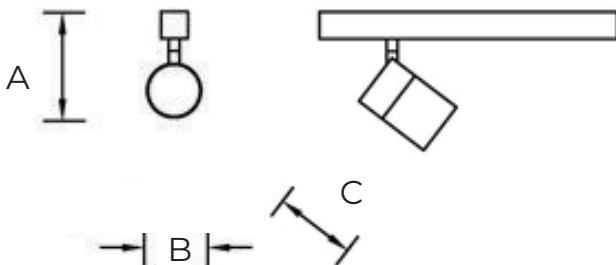

Code	A	B	C
TRSLV35	30 mm	35 mm	50 mm
TRSLV54	73 mm	54 mm	128 mm
TRSLV66		66 mm	159 mm

Product Code	LED Wattage	Lumen Output	Lumen /Watt	Colour Temp.	Beam Angle
TRSLV35/5.6/BLK	5.6W	596	106	4000K	40°
TRSLV54/6.1/BLK	6.1W	708	116	4000K	36°
TRSLV54/6.8/BLK	6.8W	789	116	4000K	36°
TRSLV54/7.5/BLK	7.5W	870	116	4000K	36°
TRSLV54/8.3/BLK	8.3W	948	114	4000K	36°
TRSLV66/11.6/BLK	11.6W	1786	154	4000K	36°
TRSLV66/16.9/BLK	16.9W	2485	147	4000K	36°
TRSLV66/22.4/BLK	22.4W	3201	142	4000K	36°
TRSLV66/24.2/BLK	24.2W	3360	139	4000K	36°

Option Code	Description
/DALI	DALI
/BTC	Casambi Dimmable
/3K	3000K
/WHT	White
/CRI90	CRI>90
/20	20° beam angle

For optional features, please include the option code suffix with the product code when ordering.