


VERSA-LINE DIRECT

Low Glare Linear LED System

- // Aluminium extruded sections in 10 standard lengths
- // Bespoke lengths available in increments of 280mm
- // Colour options in 3000K/4000K
- // Utilises the Vossloh Light&Dark lens concept for low glare, along with super-efficient LEDs mounted on black or white printed circuit boards
- // Incorporates Tridonic LED drivers
- // Dimmable and emergency options available
- // Compatible with Casambi wireless control system
- // 65° lens as standard, with 90° option
- // CRI>80, with CRI >90 option
- // 5-year warranty

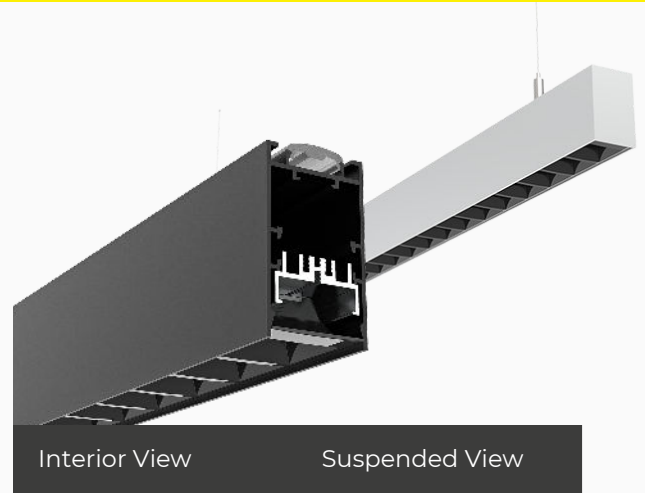


Construction

The Versa-Line Low Glare fitting is supplied as a suspended luminaire with direct only, or direct/indirect light distribution options. Suspension is made simple using a single-point ceiling bracket with a 2m adjustable stainless steel wire system. The linear aluminium profile is available in 10 standard lengths up to 3092 mm, with bespoke lengths available to order upon request. The low glare rating is achieved utilising the Vossloh Light&Dark system to recess and conceal the LEDs.

Technical Parameters	
Operating Life - L80/B10 at 50°C	72,000 hrs
LED Binning	SDCM <3
Lens Optical Efficiency	91-92%

Size Options

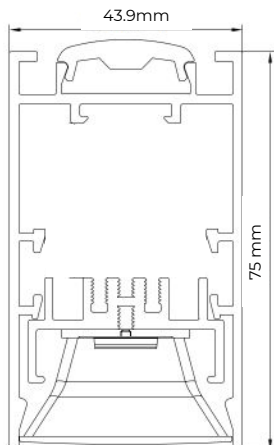

Product Code (mm)	LED Wattage	Lumen Output	Lumen / Watt	Colour Temperature	Beam Angle
VLD572	8	1380	182	4000K	65°
VLD852	11	2070	182	4000K	65°
VLD1132	15	2760	182	4000K	65°
VLD1412	19	3450	182	4000K	65°
VLD1692	22	4140	182	4000K	65°
VLD1972	26	4830	182	4000K	65°
VLD2252	30	5520	182	4000K	65°
VLD2532	34	6210	182	4000K	65°
VLD2812	37	6900	182	4000K	65°
VLD3092	41	7107	182	4000K	65°

Section	Option Code	Description
1 EMERGENCY	/ NE	No Emergency
	/ M	3 Hour Maintained Emergency
	/ MZ	3 Hour Maintained DALI Emergency
2 CONTROL	/ ND	Non-Dim
	/ DA	DALI Dimmable Driver
	/ BTC	Casambi Dimmable Driver
3 FINISH	/ 9005	RAL9005 Black (light output -11%)
	/ 9016	RAL9016 White
4 CCT	/ 4K	4000K LED
	/ 3K	3000K LED (light output -1%)
	/ TW	2700K - 6500K LED
5 BEAM ANGLE	/ R65	65 degree lens (light output -1%)
	/ R90	90 degree lens
6 CRI	/ 80	CRI>80
	/ 90	CRI>90 (light output -15%)

Recessed option, wall washer beam angles, custom lengths and shapes, plus opal diffuser and blackout covers for different visual effects available upon request.