

## BLADE - SUSPENDED LOW GLARE PANEL



### Luminaire Construction

The Blade suspended panel has been specifically designed as an attractive option for exposed ceilings. The Blade is a simple, rapid-install, low glare solution for large offices requiring cost effective lighting.

The seamless frame is manufactured from aluminium, and the microprism internal diffuser can achieve a UGR19 glare rating.

The 2 or 4 point 1.5m suspension kit fits easily to the fixing-free ceiling rose while the control gear is set inside a durable housing. As standard, the luminaire utilises a European-branded electronic control gear.


- // Supports UGR19 compliance
- // CRI80 as standard
- // 70/30 direct & indirect light distribution
- // Ceiling rose to house control gear
- // 4000K as standard
- // Black trim available (other colours by request)
- // 5-year warranty
- // Longer than 1.5m suspension kits are also available

Product Code	LED Wattage	Lumen Output	Lumen /watt	Colour Temperature
BLD42	39W	4164	106	4000K

### Typical Application

Exposed Ceilings, Office Areas, Meeting Rooms, Reception Areas, Waiting Rooms, Schools, Hospitals Production Facilities.

### Dimensions

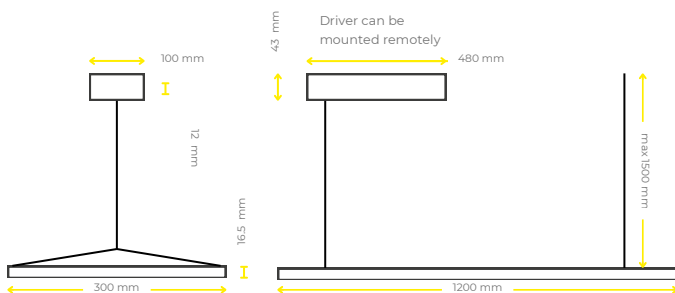

### Options

Section	Option Code	Description
1 - EMERGENCY		Leave blank if no emergency
	/M	3 Hour Maintained Emergency
	/MZ	3 Hour Maintained DALI Emergency
2 - CONTROL	/ND	Non-Dim
	/DA	DALI Dimmable Driver
	/BTC	Casambi Dimmable Driver
3 - FINISH	/WH	White (RAL 9016), with matching ceiling rose
	/BK	Black (RAL 9005), with matching ceiling rose

#### FULL CODE EXAMPLE:

BLD42/MZ/BTC/WH = Blade Suspended Panel, Monitored Emergency, Casambi Dim, White Finish

For optional features, please include the option code suffix with the product code when ordering.