

HALO



Construction


The Halo is designed to be surface mounted or suspended to a single suspension point. Available in 5 different sizes and a wide variety of RAL colours. It is the ideal option when lighting a large open space or simply wanting to create a stunning feature. The versatility of the aluminium body and LED technology used allows for inclusion of many control options, including dimming, emergency options, wireless switching and scene-setting Casambi control technology.

- // Decorative surface/suspended LED luminaire
- // European branded LED drivers
- // Up to 85 lumens per circuit watt
- // Direct/Indirect option available - 90:10 ratio
- // Extruded aluminium body available in 16 colours
- // Colour-matched ceiling rose
- // 650mm, 950mm, 1250mm, 1500mm and 1950mm diameter body
- // LED 4000K, CRI>80, 50,000h life
- // Opal polycarbonate diffuser
- // Compatible with Casambi wireless control system
- // 5-year warranty

Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities.

Size Options

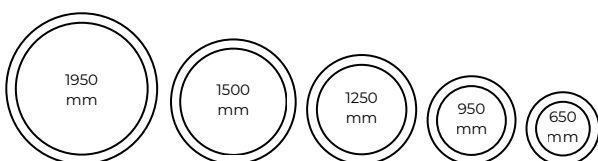

Please note: These are external diameters

SURFACE



SUSPENDED



HALO

Halo Surface and Suspended					
Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temp.	Size
HLO36	39W	3032	77	4000K	650 x 65 x 85mm
HLO54	56W	4548	81	4000K	950 x 65 x 85mm
HLO72	73W	6064	83	4000K	1250 x 65 x 85mm
HLO90	89W	7580	85	4000K	1500 x 65 x 85mm
HLO108	112W	9096	81	4000K	1950 x 65 x 85mm
Halo Suspended Direct/Indirect/90% Direct + 10% Indirect					
HLO36/DIR/IND	39W	3032	77	4000K	650 x 65 x 85mm
HLO54/DIR/IND	56W	4548	81	4000K	950 x 65 x 85mm
HLO72/DIR/IND	73W	6064	83	4000K	1250 x 65 x 85mm
HLO90/DIR/IND	89W	7580	85	4000K	1550 x 65 x 85mm
HLO108/DIR/IND	112W	9096	81	4000K	1950 x 65 x 85mm

Control Options

Section	Option Code	Description
1 - EMERGENCY		Leave blank if no emergency
	/M	Emergency
	/MZ	DALI Emergency
2 - CONTROL	/ND	Non Dimmable
	/DA	DALI Dimmable
	/D	1-10V Dimmable
	/BTC	Casambi Dimmable
3 - FINISH	/9016	RAL9016 White
	/9005	RAL9005 Black
4 - CCT	/4K	4000K
	/3K	3000K

Colour Options

Option Code	Description
/ W	White (RAL 9016)
/ G	Grey (RAL 9006)
/ B	Black (RAL 9005)
/ U (POA)	Blue (RAL 5002)
/ V (POA)	Green (RAL 6018)
/ T (POA)	Yellow (RAL 1021)
/ K (POA)	Red (RAL 3020)
/ N (POA)	Jungle
/ D (POA)	Goldeneye
/ O (POA)	Sahara
/ L (POA)	Autumn
/ R (POA)	Rusty Chain
/ C (POA)	Pure chocolate
/ 1 (POA)	Mist
/ 9 (POA)	Darkrock
/ I (POA)	Carbon
/ P (POA)	Copper
/ S (POA)	Old Rose

Suspension Options

Option Code	Description
Ceiling Rose with Central Suspension Point (including 1.5m wires)	
CR1	Ceiling Rose Kit for 650 and 950mm versions - 3 wire
CR2	Ceiling Rose Kit for 1250mm versions - 4 wire
CR3	Ceiling Rose Kit for 1550mm versions - 5 wire
CR4	Ceiling Rose Kit for 1950mm versions - 6 wire
Colour-matched Ceiling Rose supplied unless specified otherwise	
Vertical Suspension Sets (Including 1.5m wires)	
SUSKIT -T1	Suspension Kit for 650 and 950mm versions - 3 wire
SUSKIT -T2	Suspension Kit for 1250mm versions - 4 wire
SUSKIT -T3	Suspension Kit for 1550mm versions - 5 wire
SUSKIT -T4	Suspension Kit for 1950mm versions - 6 wire
Ceiling Rose for Vertical Suspension (Excluding wires)	
CR0	Ceiling Rose with Vertical Suspension Sets
Supply Cable	
CABTR3C	1.5m Transparent Current Cable 3 x 0.75mm ²
CABTR5C	1.5m Transparent Current Cable 5 x 0.75mm ²
NOTE: Alternative length suspension kits available - POA	

