

## M-LINE 82 SURFACE AND SUSPENDED

M-LINE®

- // Aluminium extruded sections in 15 standard lengths
- // Bespoke lengths available in multiple increments of 560mm and 280mm.
- // 3m clear flex
- // Colour options in 3000K/4000K
- // Custom shapes available subject to design
- // Incorporates European branded LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Dimmable and emergency options are available
- // Compatible with Casambi wireless control system
- // Uniform light and controlled beam with specialised diffuser
- // Low UGR
- // Energy efficient with over 126 lm/W
- // Lifetime >80,000 h L80 B10
- // CRI>80
- // 5-year warranty




### Construction

The M-Line 82 linear LED light is supplied as a suspended fitting as standard but the profile can be utilised for surface mounting. This is achieved by directly fixing through the rear of the profile. Suspension is made simple using a single-point ceiling bracket with a 2m adjustable stainless steel wire system. The LED linear luminaire aluminium profile is available in standard lengths up to 4500mm with bespoke lengths and shapes available to order upon request. The Low UGR is achieved with a specialised polycarbonate diffuser. **We are now sending out our M-Line products pre-flexed to make installation easy for you!**

### Typical Applications

General Office Areas, Conference Rooms, Educational Facilities, Retail Units, Healthcare Facilities, Hospitality and Leisure Facilities.

### Dimensions

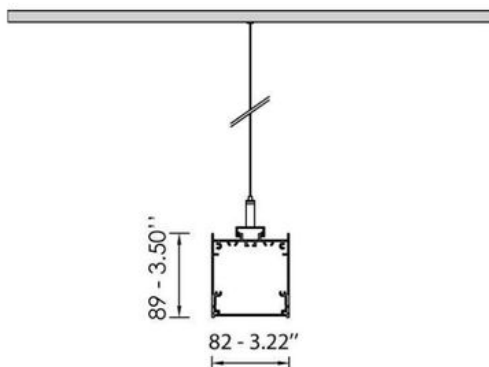

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temp.	Size
MLE82/580	11W	1424	126	4000K	580mm
MLE82/860	17W	2136	126	4000K	860mm
MLE82/1140	23W	2848	126	4000K	1140mm
MLE82/1420	28W	3560	126	4000K	1420mm
MLE82/1700	34W	4272	126	4000K	1700mm
MLE82/1980	40W	4984	126	4000K	1980mm
MLE82/2260	45W	5696	126	4000K	2260mm
MLE82/2540	51W	6408	126	4000K	2540mm
MLE82/2820	57W	7120	126	4000K	2820mm
MLE82/3100	62W	7832	126	4000K	3100mm
MLE82/3380	68W	8544	126	4000K	3380mm
MLE82/3660	74W	9256	126	4000K	3660mm
MLE82/3940	79W	9968	126	4000K	3940mm
MLE82/4220	85W	10680	126	4000K	4220mm
MLE82/4500	91W	11392	126	4000K	4500mm

### Product Configuration

Choose your options to generate the full order code

Section	Option Code	Description
1 - EMERGENCY	/M	Leave blank if no emergency
	/MZ	Emergency
	/ND	DALI Emergency
2 - CONTROL	/DA	Non Dimmable
	/BTC	DALI Dimmable
3 - FINISH	/9016	Casambi Dimmable
	/9005	RAL9016 White
	/9006	RAL9005 Black
4 - CCT	/4K	RAL 9006 Grey
	/3K	4000K LED
5 - CRI	/80	3000K LED
		CRI>80

FULL CODE EXAMPLE: MLE82/580/M/BTC/9006/4K/80