


SPARK

Mini Architectural Pinhole Low Glare Downlight

- // Tridonic SLE advanced LED engine
- // Lumen maintenance 55,000 hours (L80/B10)
- // 40° reflector as standard, 24° option
- // Die-cast bezel available in black or white
- // Matt black anti-glare baffle available
- // Low glare UGR<16 with black baffle
- // Wide choice of options and accessories
- // Wireless, DALI dimming and emergency options
- // CRI>80
- // 5-year warranty
- // Manufactured in the UK

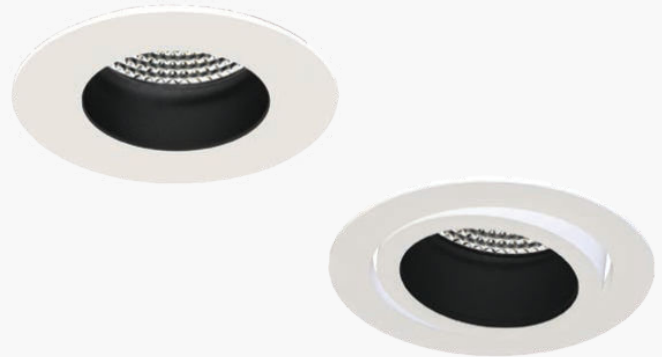

Construction


Our Spark is a mini pinhole architectural LED downlight contributing towards UGR>16 low glare lighting powered by Tridonic LEDs.

The smallest in our range, this pinhole-style minimalist architectural downlight offers low glare illumination for numerous applications.

Typical Applications

General Office Areas, Large Receptions, Boardrooms, Atriums, Educations Facilities, Hotels and Leisure Facilities, Hospitality Venues and Retail Units.

Technical Drawing

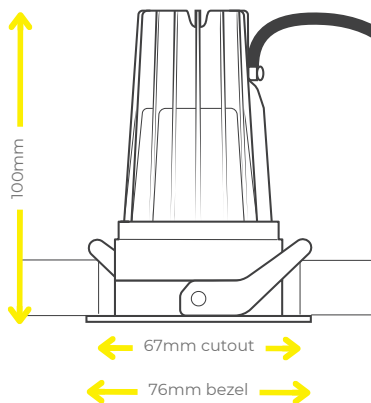

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Beam Angle
SPK6	6W	600	92	4000K	40°
SPK8	8W	775	98	4000K	40°

Section	Option Code	Description
1 - EMERGENCY		If no emergency required, leave blank
	/M	Emergency
	/MZ	DALI Emergency
2 - CONTROL	/ND	Non Dim
	/DA	DALI Dim
	/BTC	Casambi Dim
3 - BEZEL / BAFFLE	/WB	White Bezel, Black Baffle
	/BB	Black Bezel, Black Baffle
	/WW	White Bezel, White Baffle
	/WTB	White Tilt Bezel, Black Baffle
	/BTB	Black Tilt Bezel, Black Baffle
4 - CCT	/WTW	White Tilt Bezel, White Baffle
	/4K	4000K
5 - LENS	/3K	3000K (-4% output)
	/24	24° lens
6 - CRI	/40	40° lens
	/80	CRI>80
7 - IP RATING	/90	CRI>90
	/20	IP20
	/54	IP54

For optional features, please include the option code suffix with the product code when ordering.

SPARK - OPTIONS AND ACCESSORIES

Options



/M
3 Hour Maintained
Emergency



/MZ
3 Hour DALI Maintained
Emergency



/BTC
Casambi Dimmable



/WTW
White Tilt Bezel, White Baffle



/BB
Black Bezel, Black Baffle



/WTB
Black Tilt Bezel, Black Baffle



/WW
White Bezel, White Baffle



/IP54
IP54 Ribbed Glass

For optional features, please include the option code suffix with the product code when ordering.