

TRS21 & 22

Architectural Track Light

- // Track mounted luminaire
- // UGR>19 can be achieved with 24° or 36° beam angles
- // Beam angle 60° as standard, options for 24° or 36°
- // High-quality powder-coated aluminium
- // 3000K option
- // CRI>80 as standard
- // IP20
- // Compatible with Casambi wireless control system
- // 5-year warranty



Construction


Our TRS luminaire has been designed as a stylish option for track applications and is ideal where appearance is important.

The body is powder-coated aluminium and gives good heat dissipation. The faceted reflector has a good reflective rate.

Typical Applications

Hospitality, Tea Points, Seating, Reception and Leisure Areas.

Dimensions

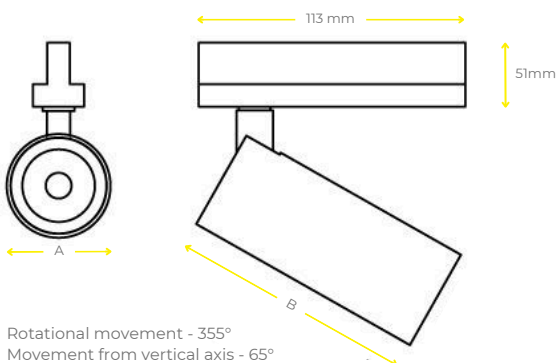

Product Code	Dimension (A)	Dimension (B)
TRS21	Ø65mm	180mm
TRS22	Ø85mm	206mm

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Beam Angle
TRS21	10W	1244	121	4000K	60°
TRS22	15W	1822	126	4000K	60°

Section	Option Code	Description
1 CONTROL	/ ND	Non Dimmable Driver
	/ TD	Triac Dimmable Driver
	/ DALI	DALI Dimmable Driver
	/ BTC	Casambi Dimmable Driver
2 COLOUR FINISH	/ BK	Black
	/ WH	White
3 CCT	/ 4K	4000K LED
	/ 3K	3000K LED (light output -3%)
4 BEAM ANGLE	/ R24	24 degree lens (light output -1%)
	/ R36	36 degree lens
	/ R60	60 degree lens
5 CRI	/ 80	CRI>80

For optional features, please include the option code suffix with the product code when ordering.