

NOVA

Low Glare Suspended Downlight

- // Super slim LED downlight with high efficiency
- // Multi-faceted reflector for 60° beam angle
- // Custom lens and reflector combination for low glare
- // Recessed option available - see separate datasheet
- // 4000K as standard, with 3000K option
- // Compatible with Casambi controls
- // IP40 in mounting box, IP54 when recessed




Construction

This Nova LED pendant light boasts high lumen efficiency and low glare. Its concave front design, along with the reflector and lens optic combination, minimizes the lamp's height and reduces glare, providing a pleasant visual experience. Additionally, it can function as both a recessed downlight and a surface-mounted light with the mounting box accessory available for the 18W and 24W versions. Suspension is achieved with standard 2m cables provided.

Typical Applications

General Office Areas, Conference Rooms, Reception Areas, Educational Facilities, Retail Units, Bars, Restaurants, Hotels and Leisure Facilities,

Dimensions

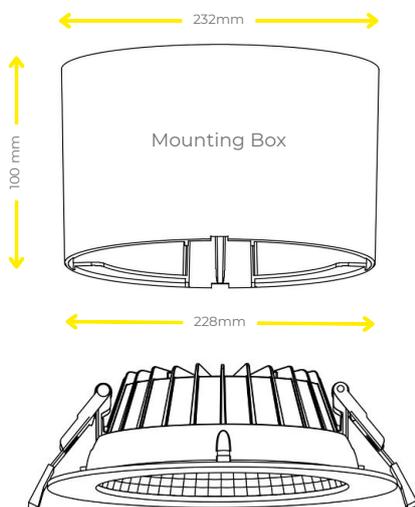

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Beam Angle
NVU18	18W	2588	146	4000K	60°
NVU24	24W	3324	141	4000K	60°

Section	Option Code	Description
1 - EMERGENCY	/M	Leave blank if no emergency
	/MZ	Emergency
	/ND	DALI Emergency
2 - CONTROL	/DA	Non Dim
	/BTC	DALI Dim
3 - FINISH	/9016	Casambi Dim
	/4K	RAL9016 White
4 - CCT	/3K	4000K
	/60	3000K (light output -5%)
5 - BEAM ANGLE	/80	60° lens
6 - CRI	/40	CRI>80
7 - IP RATING		IP40 (when used with mounting box)

See separate datasheet for recessed (product code NOV) or surface (product code NVS) options.

For optional features, please include the option code suffix with the product code when ordering.