

SAFECHECK WIRELESS

Casambi-enabled Emergency Lighting Automation

- // Mains-powered, Casambi-enabled system
- // Can monitor up to 124 devices using the Casambi platform
- // Routine testing and monitoring of installed emergency lighting in accordance with BS EN 50172
- // Provide testing and reporting which complies with BS EN 62034
- // Monthly function tests and an annual duration test
- // Automatic warning triggers for any faults




Overview

The SafeCheck surface or recessed monitoring panel comes with Casambi enabled capability, for monitoring a Casambi network with emergency devices.

It can be connected to two Casambi networks as standard, and more on request.

Software is also available to view more than one SafeCheck Panel at a time, on a PC. Commissioning services also available.

Dimensions

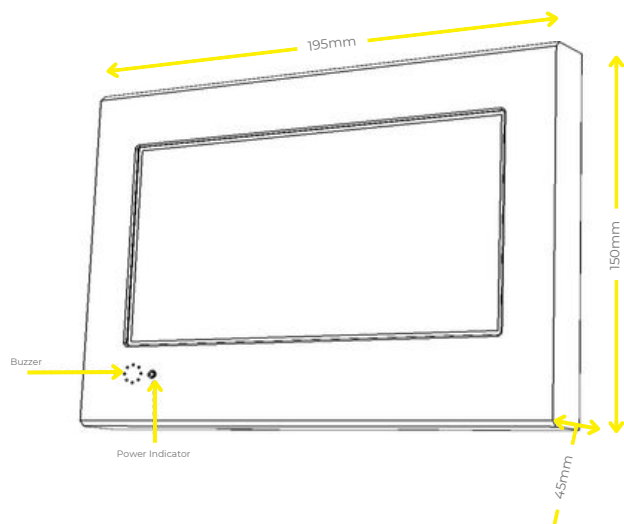

Product Code	Colour	Dimensions
SAFECHECK	White	150 x 195 x 45 mm

Technical Specifications	
Power Supply	220-240v AC, 50Hz
Radio operation frequencies	2.4 – 2.480 GHz
Ambient temperature	-20 to +50 °C
Weight	595g
Ingress Protection	IP20
Power consumption	16W max

