

## LEIP30LG600

### Low Glare Backlit LED Panel - IP Rated

- // Utilises European branded control gear
- // LED 4000K, CRI>80, 50,000 hours life
- // Low maintenance
- // IP65
- // Impact rating IK08
- // UGR <22
- // High efficiency
- // Alternative wattages available
- // 5-year warranty



### Construction

Our robust LEIP30LG IP rated panel 600 x 600 has been designed to fit within suspended ceilings in more rigorous applications than standard offices.


The aluminium frame comes with fitted stainless steel buckles, which allows the frame to be clamped to the ceiling for IP rating and dust exclusion.

The back of the light is sealed with a flexible strip where it connects to the ceiling, preventing bacteria collection. The frame is manufactured in RAL9016 as standard.

### Typical Applications

Healthcare, industrial cleanrooms, laboratories, specialist imaging suites, commercial kitchens

### Dimensions

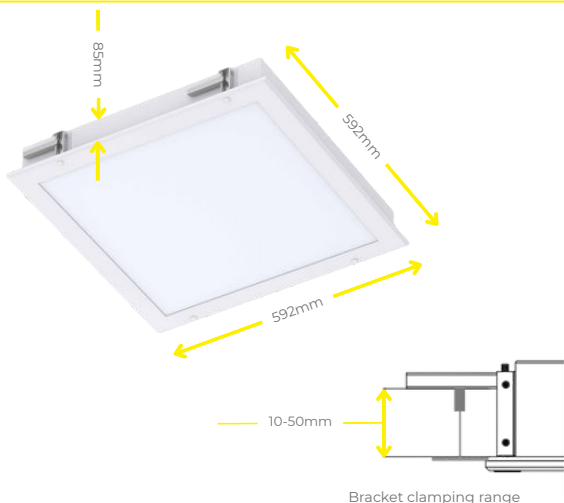

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature
LEIP30LG600	30W	3954	130	4000K

Section	Option Code	Description
1 - EMERGENCY	/M	Leave blank for no emergency
	/MZ	3 Hour Maintained Emergency
	/MZ	3 Hour Maintained Monitored Emergency
2 - CONTROL	/ND	Non-Dimmable Driver
	/DALI	DALI Dimmable Driver
	/BTC	Casambi Dimmable Driver
3 - FINISH	/9016	White RAL9016
4 - CCT	/4K	4000K LED



Stainless steel buckles

**Note:** Product weight is 4.15 kg, please ensure ceiling structure is sufficient.



Screw access for ceiling clamps

For optional features, please include the option code suffix with the product code when ordering.