

LMX

LED Tape Kits

- // 24v LED tape kit, with aluminium profile options and associated drivers
- // Includes 2m pre-soldered tails for easy connection
- // Specially developed tape allows longer lengths from a single power source
- // Accessories including endcaps if needed
- // 3000K option
- // CRI>80
- // IP20
- // 5 year warranty
- // Simplified system to allow quick ordering




Construction

Our new constant current LED tape combines the convenience of constant voltage power, with the performance benefits of constant current regulation. Designed to run from a standard 24v driver, it maintains consistent brightness over longer runs - ideal for extended installations powered from a single source. Available as complete kits including driver, pre-selected tape lengths, and compatible profile, this system streamlines ordering, simplifies specification, and improves stock efficiency.

Technical Data

Product Code	SDCM/binning	CRI	Power source	IP Rating
LMX10	3	> 90	Single end	IP20
LMX20	3	> 80	Single end	IP20

Dimensional Data

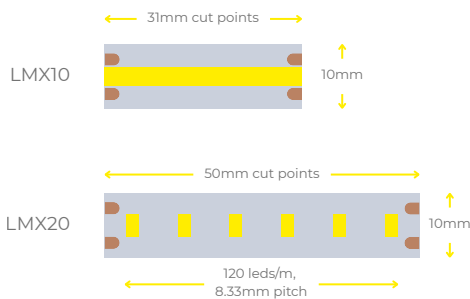

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature
LMX10	10W/m	892 lm/m	89 lm/W	4000K
LMX20	21W/m	2287 lm/m	110 lm/W	4000K

Section	Option Code	Description
1 LENGTH	/5M	5m length
	/10M	10m length
	/15M	15m length (LMX10 only)
	/20M	20m length (LMX10 only)
2 CONTROL	/ND	Non-dim
	/DA	DALI
	/BTC	Casambi
3 PROFILE	MLP002	MLP002 Profile
	MLP044	MLP044 Profile
	MLP018	MLP018 Profile
	MLP114	MLP114 Profile (LMX10 only)
	SLP1616	SLP1616 Profile (LMX10 only)
4 CCT	MLP215	MLP215 Profile
	/4K	4000K LED
5 ACCESSORIES	/3K	3000K LED
	/EC	Leave blank for no accessories With end caps

Example Code: **LMX10/15M/BTC/MLP044/4K/EC**

LMX

System Options - Profile

Option Code	Dimensions	Product Image	Max Tape Width	Max Tape Power
MLP002	<p>8.5mm 17mm</p>		12mm	15W/m
MLP044	<p>15mm 23.5mm</p>		18mm	25W/m
MLP018	<p>35mm 35mm</p>		30mm	25W/m
MLP114	<p>6mm 18mm</p>		12mm	10W/m
SLP1616	<p>16mm 16mm</p>		10mm	10W/m
MLP215	<p>16mm 25mm 67mm</p>		20mm	18W/m