

## M-LINE 54 - UGR19 RECESSED

M-LINE®

- // Aluminium extruded sections in 15 standard lengths
- // Bespoke lengths available in multiple increments of 560mm and 280mm
- // Colour options in 3000K/4000K
- // 3m clear flex
- // Incorporates European branded LED drivers
- // Utilises latest generation long-life LEDs from leading manufacturers
- // Dimmable and emergency options available
- // Compatible with Casambi wireless control system
- // Uniform light and controlled beam with specialised diffuser
- // CRI>80
- // 5-year warranty




### Construction

Low glare, UGR19 compliant luminaire is supplied as a recessed fitting with direct and even light distribution. Recessing the LED linear profile requires an extra 10mm cut out for each standard length. The recessed linear aluminium profile is available in standard lengths up to 4517mm, with bespoke lengths available to order upon request. The low UGR is achieved with a specialised microprismatic diffuser manufactured from extruded PMMA.

### Typical Applications

General Office Areas, Conference Rooms, Educational Facilities, Reception Areas, Retail Units, Healthcare Facilities, Hospitality and Leisure Facilities.

### Dimensions

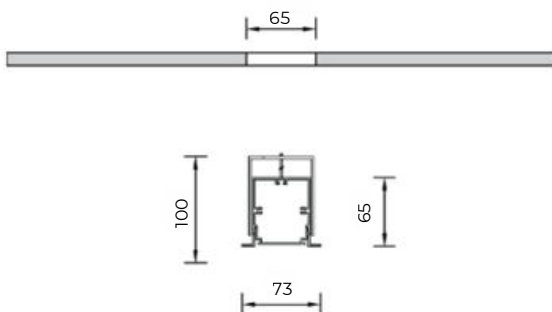

For optional features, please include the option code suffix with the product code when ordering.

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temp.	Size
MLR54/590	10W	1548	155	4000K	590mm
MLR54/870	15W	2322	155	4000K	870mm
MLR54/1151	20W	3096	155	4000K	1151mm
MLR54/1431	25W	3870	155	4000K	1431mm
MLR54/1712	30W	4644	155	4000K	1712mm
MLR54/1992	35W	5418	155	4000K	1992mm
MLR54/2273	40W	6192	155	4000K	2273mm
MLR54/2553	45W	6966	155	4000K	2553mm
MLR54/2834	50W	7740	155	4000K	2834mm
MLR54/3114	55W	8514	155	4000K	3114mm
MLR54/3395	60W	9288	155	4000K	3395mm
MLR54/3675	65W	10062	155	4000K	3675mm
MLR54/3956	70W	10836	155	4000K	3956mm
MLR54/4236	75W	11610	155	4000K	4236mm
MLR54/4517	80W	12384	155	4000K	4517mm

### Product Configuration

Choose your options to generate the full order code

Section	Option Code	Description
1 - EMERGENCY		Leave blank if no emergency
	/M	Emergency
	/MZ	DALI Emergency
2 - CONTROL	/ND	Non Dim
	/DA	DALI Dim
	/BTC	Casambi Dim
3 - FINISH	/9016	RAL9016 White
	/9005	RAL9005 Black
	/9006	RAL9006 Grey
4 - CCT	/4K	4000K LED
	/3K	3000K LED
5 - CRI	/80	CRI>80

#### FULL CODE EXAMPLE:

MLR54/1431/MZ/DA/9005/4K/80 = M-Line 54 UGR19 Recessed Linear Light, 1431mm, DALI Emergency, DALI Dim, Black RAL9005, 4000K, 80