

## EPIC

### IP65 Sealed LED Downlight

- // 60° beam angle
- // Available in 5W, 10W or 13W
- // Mains dimmable as standard
- // CRI>80
- // Tiltable version available in 13W
- // 3000K option available
- // PF 0.9
- // 40,000 hours rated life
- // Complete with driver 5-year warranty




### Construction

Our Epic range of LED downlights has been designed as an IP65 LED downlight suitable for multiple applications where a high-output, recessed downlight is required. It is suitable for installation directly into either suspended or plasterboard ceilings. The luminaire housing is manufactured using die-cast aluminium and finished with a white powder-coated bezel. The faceted reflector is manufactured using highly polished aluminium material, and the sealed diffuser is manufactured using PMMA material.

### Typical Applications

Toilets, Shower Rooms, Corridors, General Office Areas, Conference Rooms, Reception Areas, Retail and Leisure Facilities.

### Dimensions

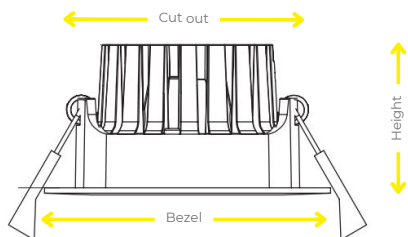

Model	Bezel	Cut Out	Height
EPC5	80 mm	68mm	40mm
EPC10	110mm	89mm	65mm
EPCT13	110mm	89mm	50mm

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Beam Angle
EPC5	6W	583	102	4000K	60°
EPC10	10W	880	90	4000K	60°
EPCT13	13W	1428	112	4000K	60°

Section	Option Code	Description
1 - EMERGENCY	/NE	No Emergency
	/M	Emergency
	/MZ	DALI Emergency
2 - CONTROL	/ND	Non Dim
	/DA	DALI Dim
	/BTC	Casambi Dim
3 - FINISH	/9016	RAL9016 White
	/9005	RAL9005 Black
4 - CCT	/4K	4000K
	/3K	3000K (light output -5%)
5 - BEAM ANGLE	/60	60° lens
6 - CRI	/80	CRI>80
7 - IP RATING	/65	IP65

### Options

