


LEP32LG600

Low Glare Backlit LED Panel

- // Supports UGR19 compliance
- // Tridonic control gear
- // 130 lumens per circuit watt
- // 3944 lumen output
- // LED 4000K, CRI>80, 54,000 hours life
- // Low maintenance (No user-serviceable parts)
- // Available in 3000K
- // Low energy consumption
- // SMD 2835 Chipset
- // Alternative wattages available
- // 5-year warranty

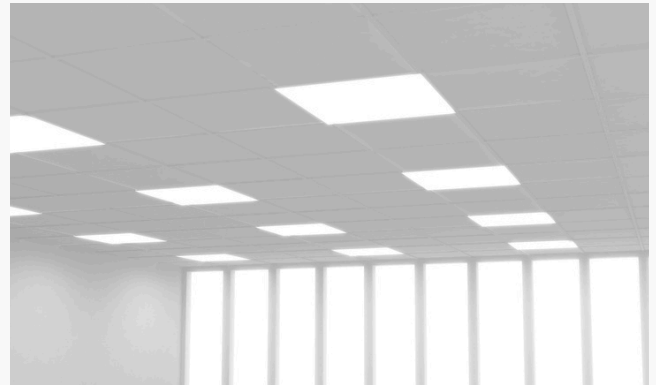

Construction

Our LEP32LG LED panel has been designed as a direct replacement for a 600 x 600 recessed modular luminaire and will fit within any standard suspended ceiling grid which has an aperture of 595mm x 595mm. The frame of the luminaire is manufactured using an aluminium profile which is finished using white powder coating designed to blend well with the ceiling grid.


The LED light source is powered by SMD 2835 LED chips.

The panel's TP(a) rated diffuser is manufactured using thermoplastic polycarbonate material which is a hard, highly transparent material and is UV stable. This offers good chemical resistance, is simple to clean and scratchproof.

Typical Applications

CAT A & CAT B office fit outs where suspended ceilings are used. For task areas, reception and breakout spaces.

Dimensions

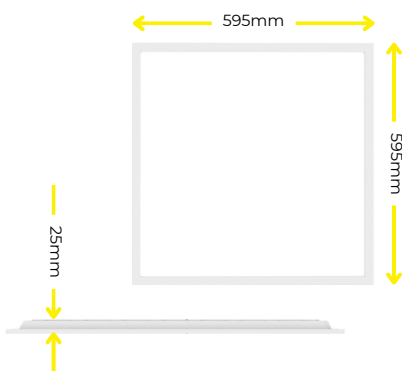

Product Configuration

Choose your options to generate the full order code

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature
LEP32LG600	31W	3944	129	4000K

Section	Option Code	Description
1 EMERGENCY		Leave blank for no emergency
	/M	3 Hour Maintained Emergency
	/MZ	3 Hour Maintained DALI Emergency
2 CONTROL	/D	0-10v Dimmable Driver
	/DA	DALI Dimmable Driver
	/BTC	Casambi Dimmable Driver
3 CCT	/4K	4000K LED
	/3K	3000K LED
4 ACCESSORIES		Leave blank for no accessories
	/SAS130-735	735mm frame for SAS130 ceilings
	/SAS130-735/AH	735mm frame for SAS130 ceilings, with air handling slots

Technical Parameters	
Operating Life - L80/B10 at 50°C	54,000 hrs
LED Binning	SDCM <3

FULL CODE EXAMPLE:

LEP32LG600/MZ/DA/4K/SAS130-735 = LEP32 Low Glare Recessed Panel Light, 3 Hour Maintained DALI Emergency, DALI Dim, 4000K with 735mm frame for SAS130 ceilings.


LEP32LG600

Accessories




SAS130-735
SAS Ceiling Frame

Dimensions

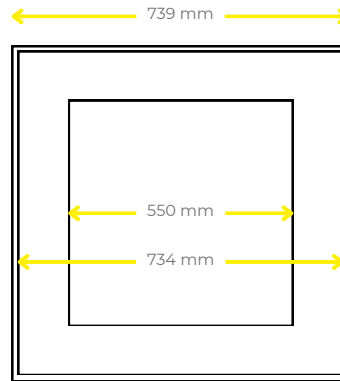


Edge Detail




SAS130-735/AH
SAS Ceiling Frame with air handling slots

Dimensions

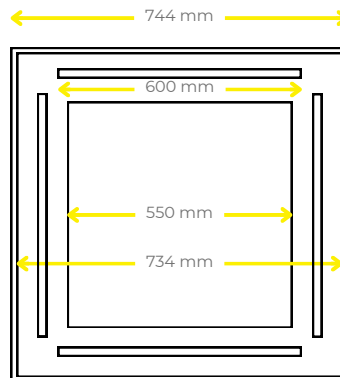

Edge Detail



For optional features, please include the option code suffix with the product code when ordering.