


LUMALED

High-Power Slimline LED Downlight

- // Ideal replacement for 210mm PL downlights
- // Slimline design only 45mm
- // High-performance aluminium heat sink
- // 90° wide beam angle
- // Switchable 3 x CCT 3000K, 4000K, 5700K
- // Surface/suspension case option available in black and white
- // DALI and emergency options available
- // Dimming available when using triac dimmer
- // IP54
- // CRI>80, 50,000 hours life
- // 5-year warranty

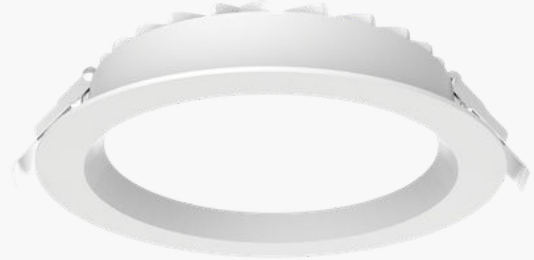


Construction

Our LumaLED luminaire has been designed as a direct replacement for 210mm PL downlights. The panel surround is manufactured using white powder-coated aluminium material. The high-performance heat sink is manufactured using die-cast aluminium, connection from the luminaire to the driver is a simple process utilising plug and play connectors. The 3 x CCT colour changeable switch makes for easy use to create the correct temperature light for the right setting.

Typical Applications

Toilets, Corridors, Stairways, General Office Areas, Reception Areas, Conference Rooms, Retail Units, Schools, Hotels and Leisure Facilities.

Dimensions

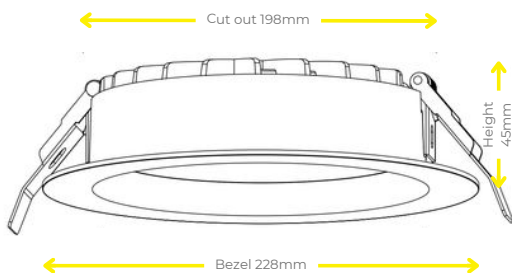

For optional features, please include the option code suffix with the product code when ordering.

Product Code	LED Wattage	Lumen Output	Lumen/Watt	Colour Temperature	Beam Angle
LLD18	16W	1860	114	4000K	90°
LLD25	23W	2613	111	4000K	90°

Section	Option Code	Description
1 - EMERGENCY	/M	Emergency
	/MZ	DALI Emergency
	/ND	Non Dim
2 - CONTROL	/TD	Triac Dim
	/D	0-10v Dim
	/DA	DALI Dim
	/BTC	Casambi Dim
3 - FINISH	/9016	RAL9016 White
	/9005	RAL9005 Black
4 - CCT	/4K	4000K
	/3K	3000K (light output -12%)
	/57K	5700K (light output - 6%)
5 - BEAM ANGLE	/90	90° diffuser
6 - CRI	/80	CRI>80
7 - IP RATING	/54	IP54

Accessory Code	Description
LUM/SUR/WHT	White Surface/Suspension Case
LUM/SUR/BLK	Black Surface/Suspension Case
MLESUS	Suspension Kit (3 Required Per Fitting)
CRI	Ceiling Rose With Central Suspension Point (Specify Colour)

